




Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance±0.05)

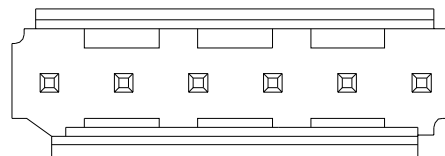


2P~6P

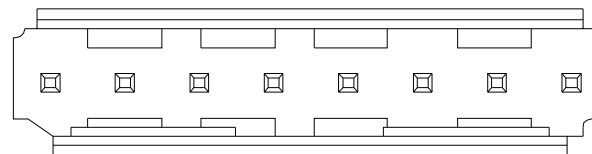


7P~20P

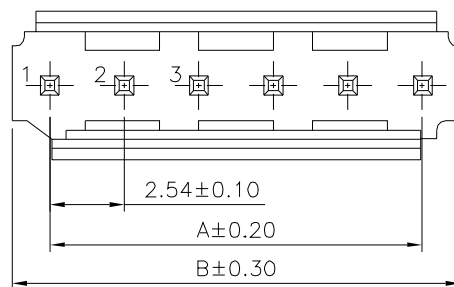

2P~6P

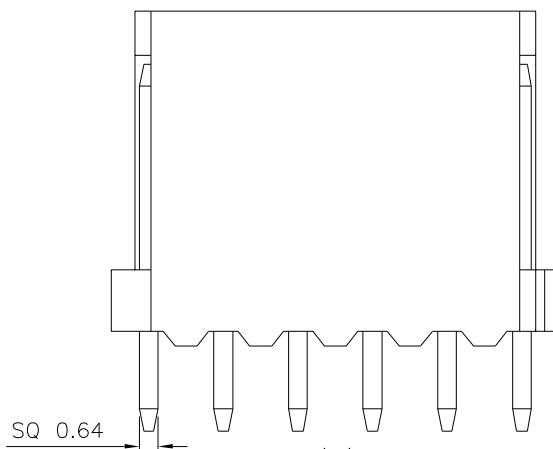

4P~20P

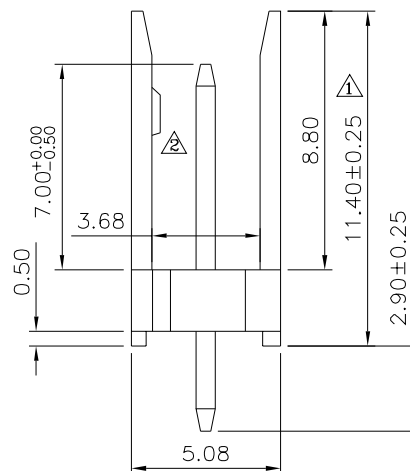

4P~20P

## SPECIFICATION

- Voltage Rating:250V
- Current Rating:3A
- Withstand Voltage:1000V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-25°C~+85°C
- Insulator:PA66(UL94V-O),Black
- Contact:Brass,Tin Plated Over Nickel
- RoHS Compliant

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 2.54  | 5.08  |
| 03  | 5.08  | 7.62  |
| 04  | 7.62  | 10.16 |
| 05  | 10.16 | 12.70 |
| 06  | 12.70 | 15.24 |
| 07  | 15.24 | 17.78 |
| 08  | 17.78 | 20.32 |
| 09  | 20.32 | 22.86 |
| 10  | 22.86 | 25.40 |
| 11  | 25.40 | 27.94 |
| 12  | 27.94 | 30.48 |
| 13  | 30.48 | 33.02 |
| 14  | 33.02 | 35.56 |
| 15  | 35.56 | 38.10 |
| 16  | 38.10 | 40.64 |
| 17  | 40.64 | 43.18 |
| 18  | 43.18 | 45.72 |
| 19  | 45.72 | 48.26 |
| 20  | 48.26 | 50.80 |

4U CON

元化興業股份有限公司  
4U CON TECHNOLOGY INC.

DRAWING No.

09038

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A4

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG. ±3°

UNIT  
mm



NO. REV.

REVISIONS

CHK

DATE

03/09/2018

07/17/2014

05/25/2013

03/26/2012

08/01/2011