


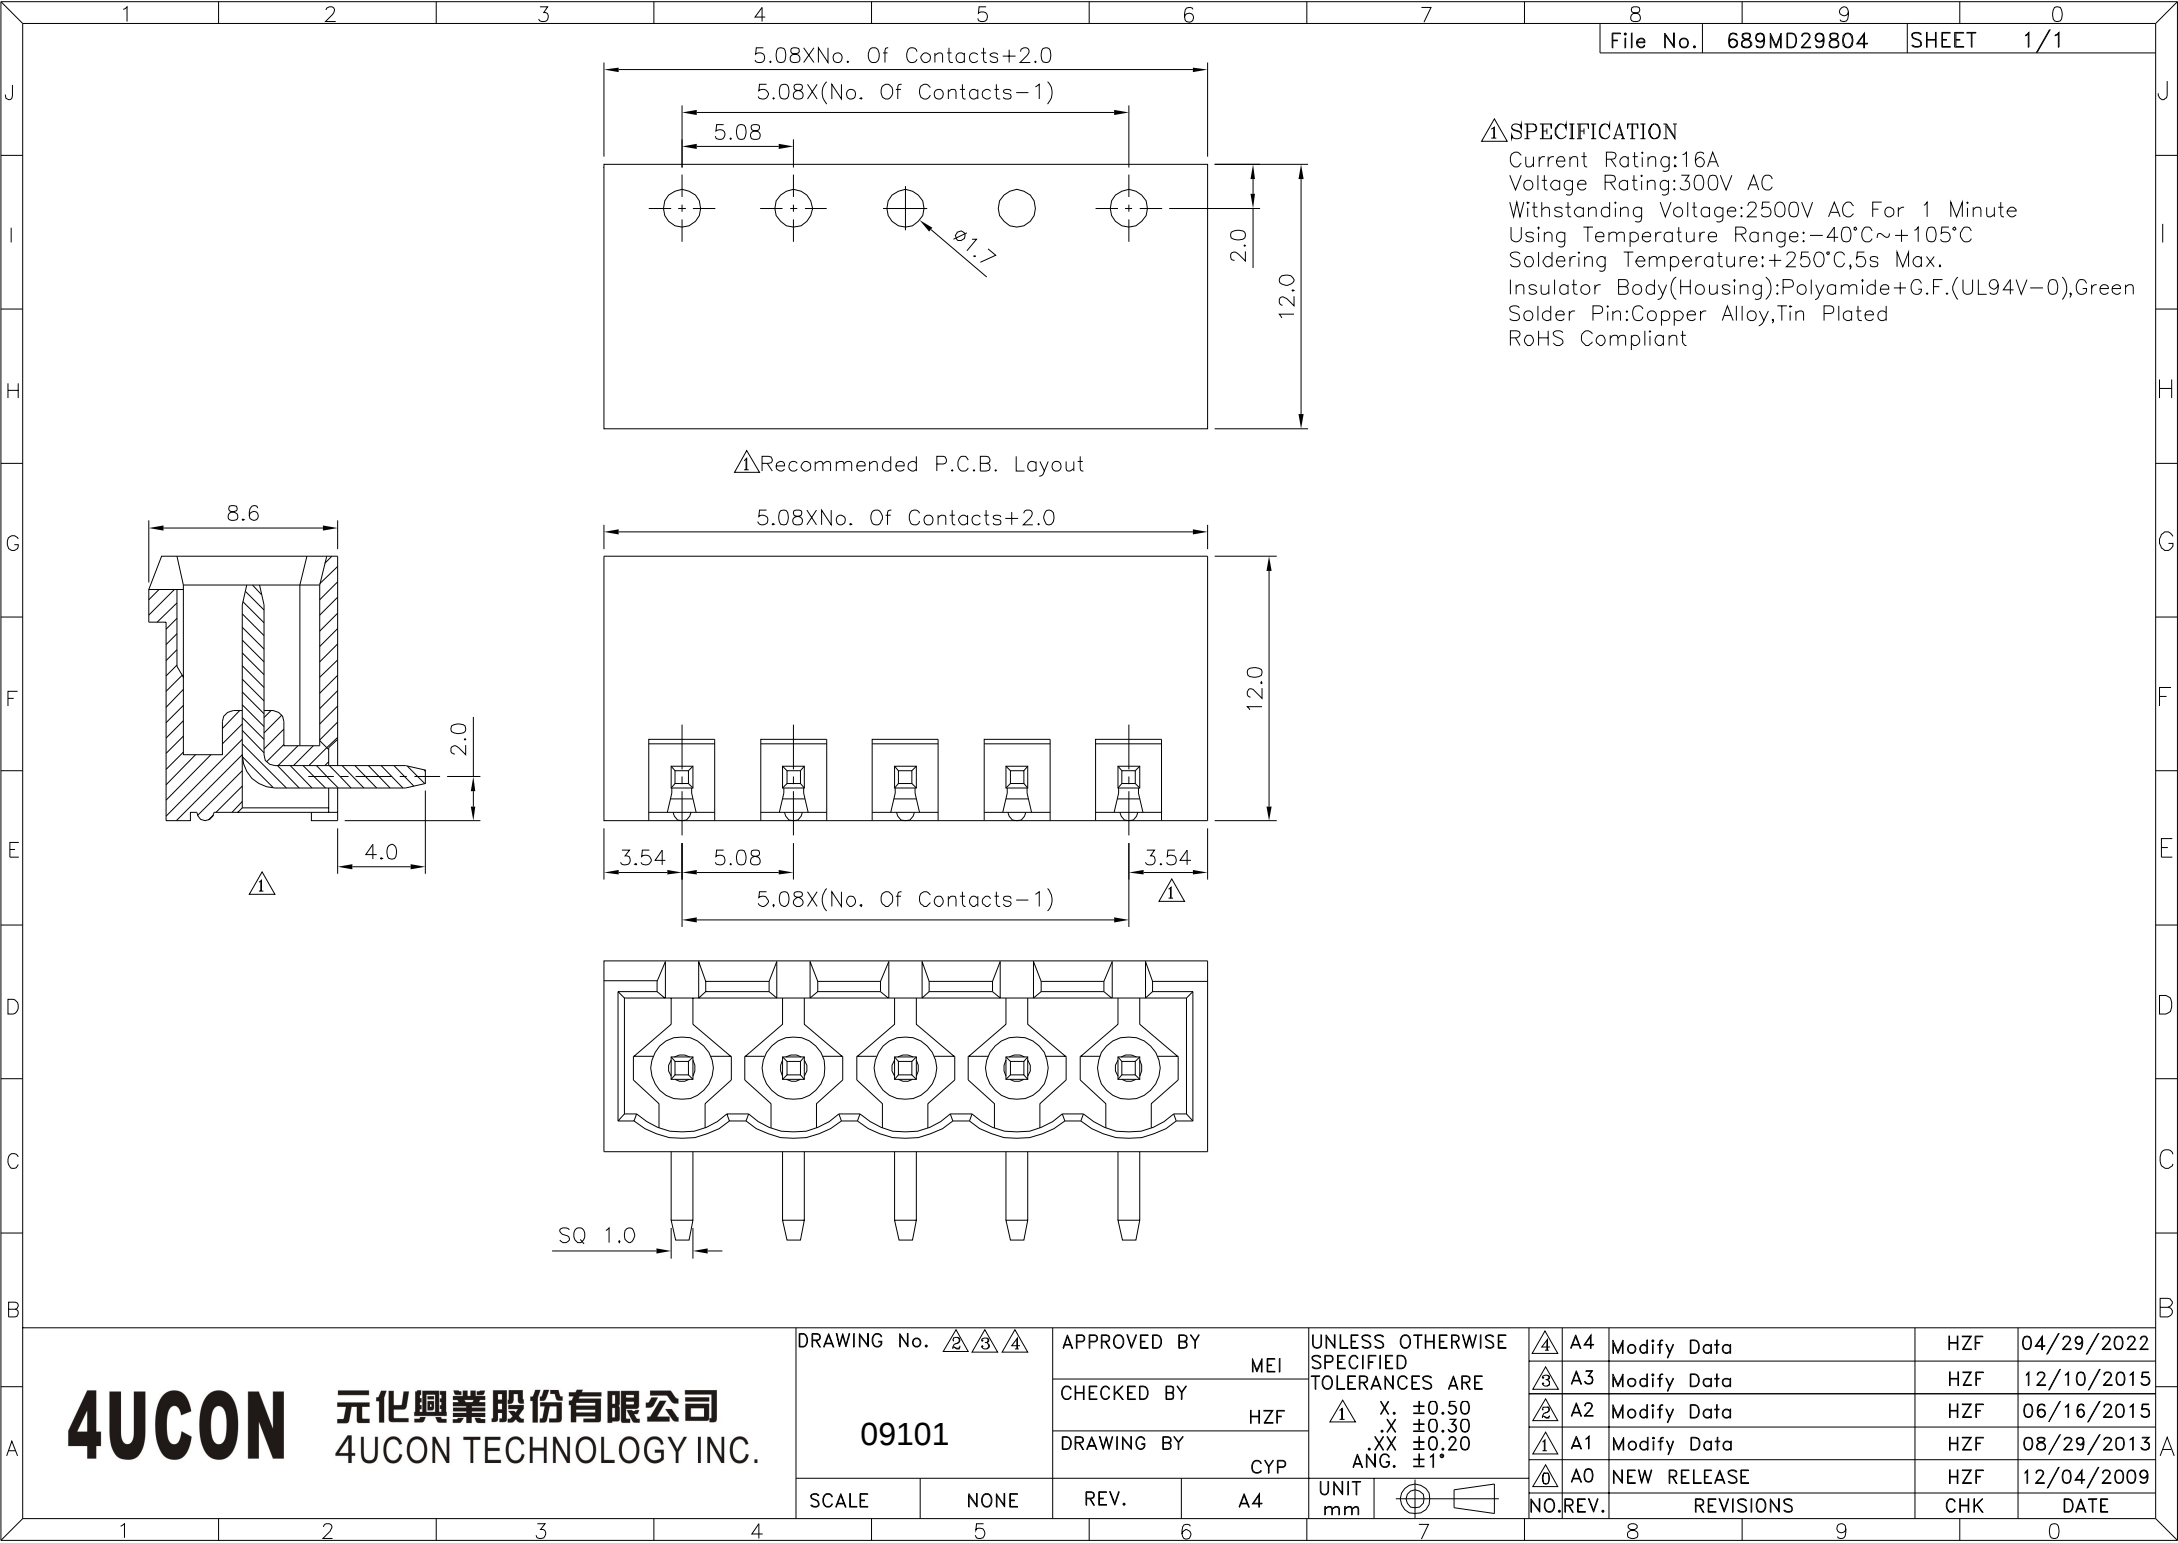

△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

△ Recommended P.C.B. Layout

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. △△△

09101

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.


A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT

mm



△ A4	Modify Data	HZF	04/29/2022
△ A3	Modify Data	HZF	12/10/2015
△ A2	Modify Data	HZF	06/16/2015
△ A1	Modify Data	HZF	08/29/2013
△ A0	NEW RELEASE	HZF	12/04/2009
NO. REV.	REVISIONS	CHK	DATE