
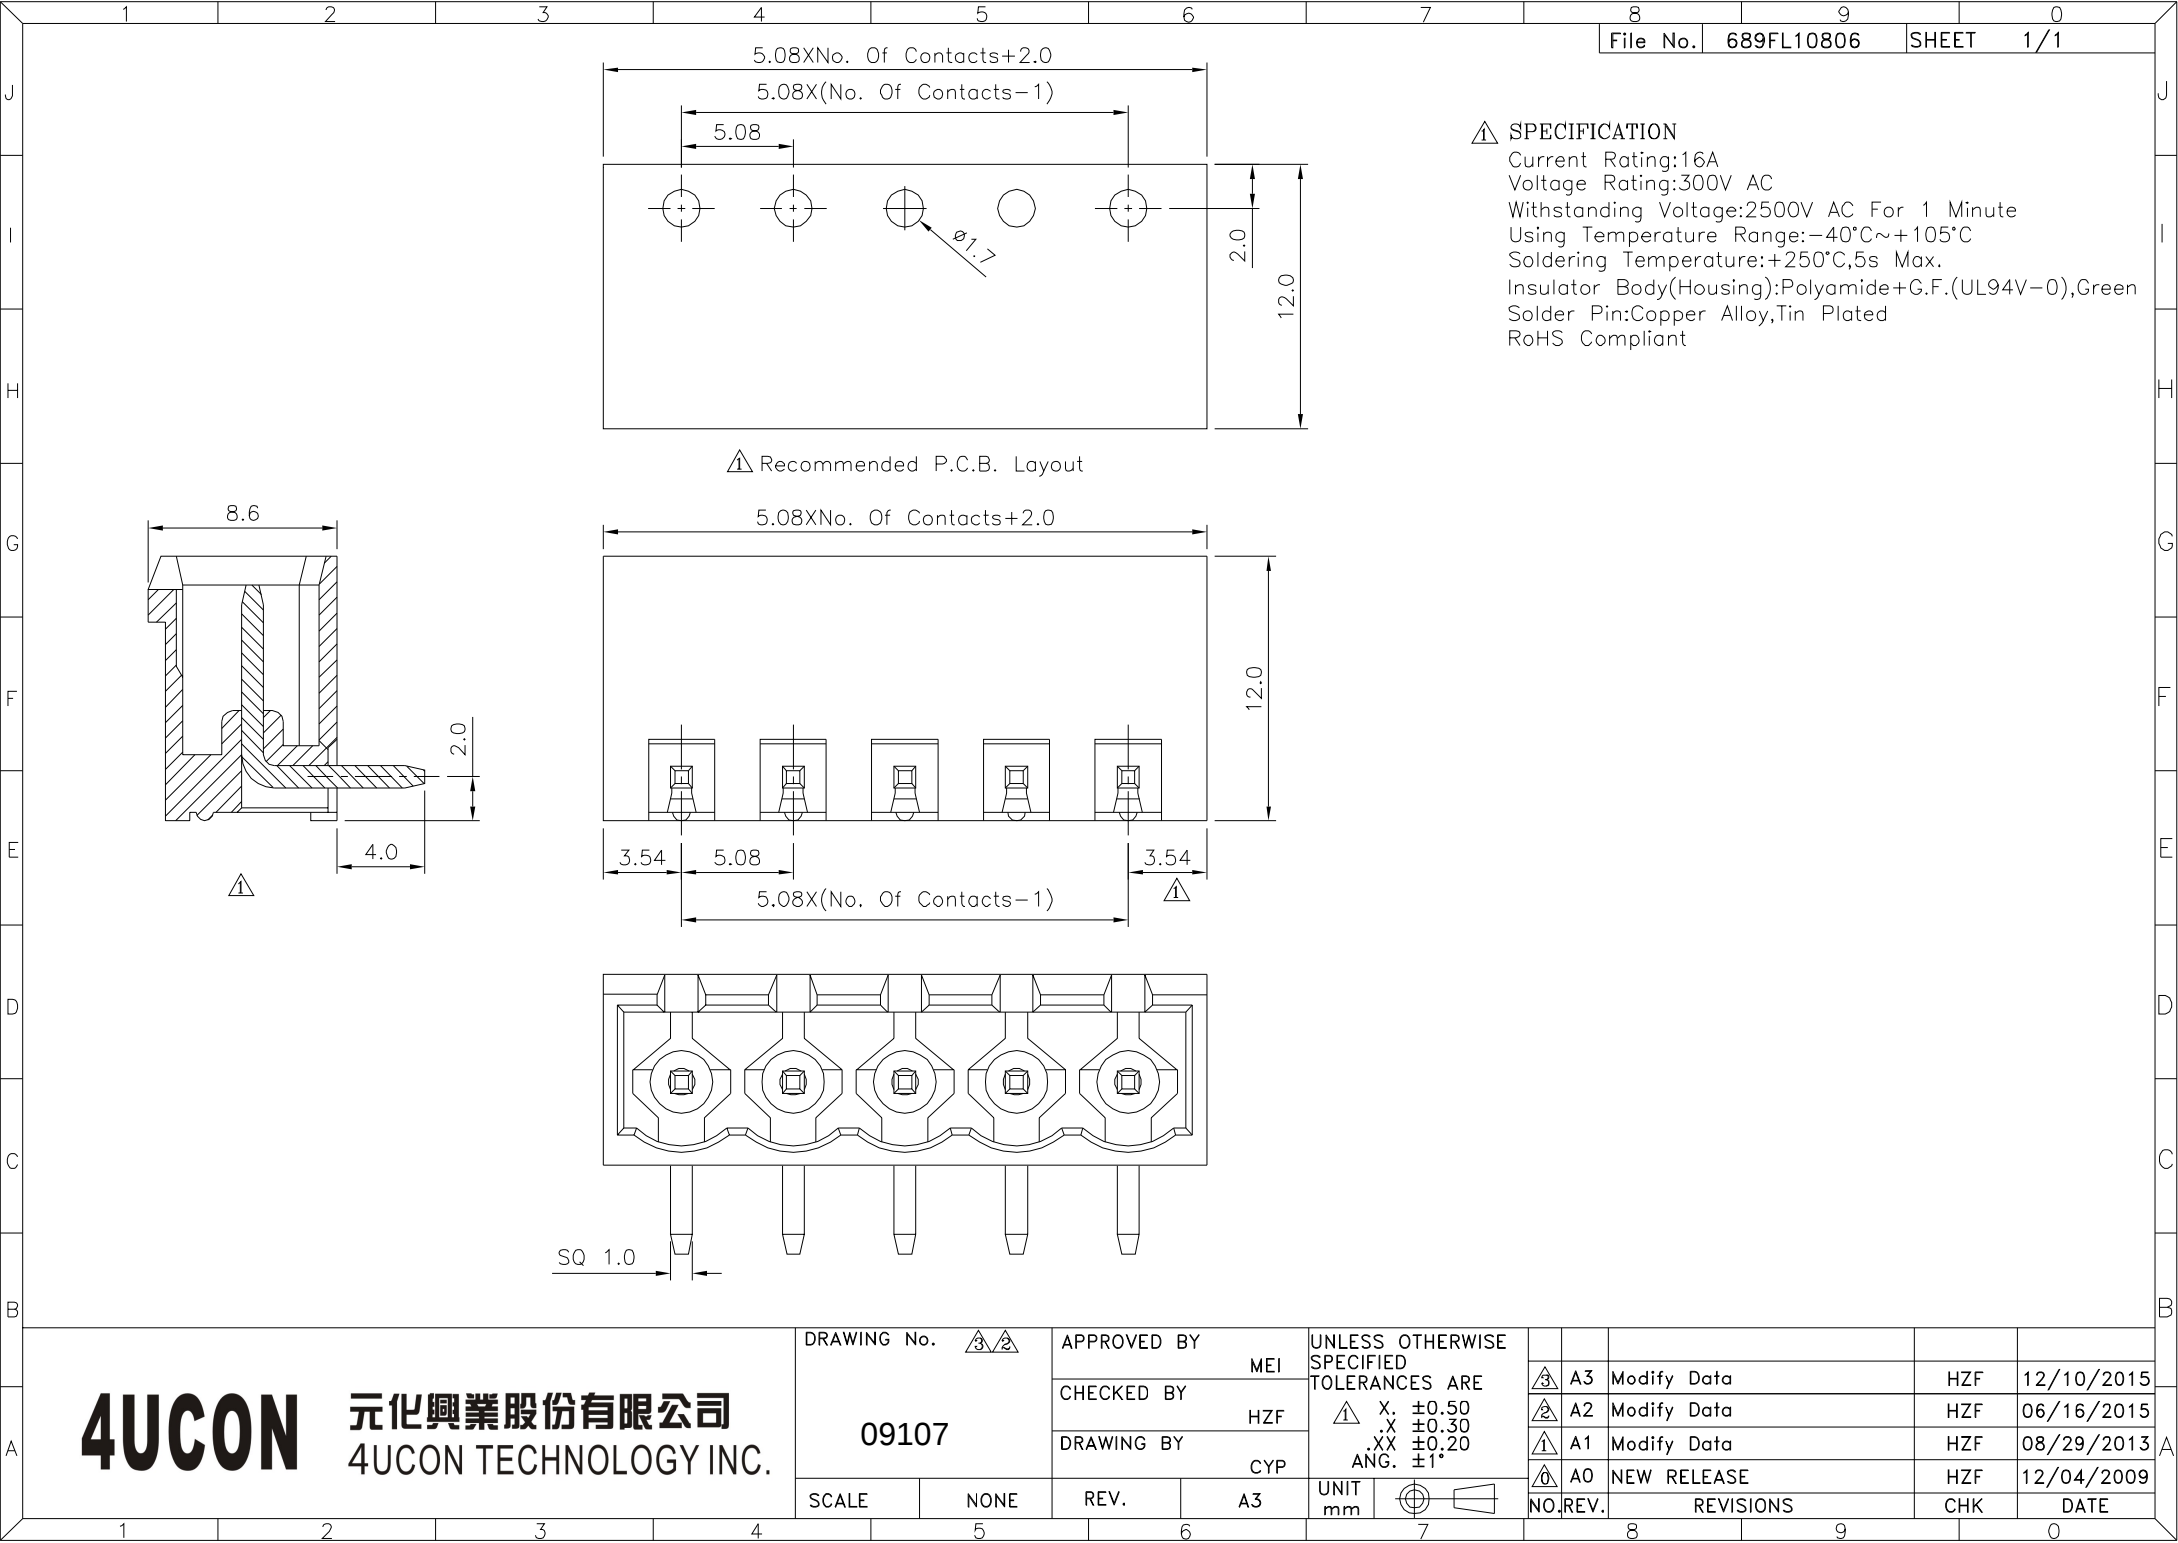




**△ SPECIFICATION**  
Current Rating:16A  
Voltage Rating:300V AC  
Withstanding Voltage:2500V AC For 1 Minute  
Using Temperature Range:−40°C~+105°C  
Soldering Temperature:+250°C,5s Max.  
Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green  
Solder Pin:Copper Alloy,Tin Plated  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|                                                                                                  |      |             |    |
|--------------------------------------------------------------------------------------------------|------|-------------|----|
| DRAWING No.  |      | APPROVED BY |    |
| 09107                                                                                            |      | MEI         |    |
|                                                                                                  |      | CHECKED BY  |    |
|                                                                                                  |      | HZF         |    |
|                                                                                                  |      | DRAWING BY  |    |
|                                                                                                  |      | CYP         |    |
| SCALE                                                                                            | NONE | REV.        | A3 |

|                                                                                                 |                                                                                       |                                                                                          |             |     |            |
|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------|-----|------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE                                                       |                                                                                       |                                                                                          |             |     |            |
|  X. ±0.50  |                                                                                       |  A3 | Modify Data | HZF | 12/10/2015 |
|  .X ±0.30  |                                                                                       |  A2 | Modify Data | HZF | 06/16/2015 |
|  .XX ±0.20 |                                                                                       |  A1 | Modify Data | HZF | 08/29/2013 |
| ANG. ±1°                                                                                        |                                                                                       |  A0 | NEW RELEASE | HZF | 12/04/2009 |
| UNIT                                                                                            |  | NO. REV.                                                                                 | REVISIONS   | CHK | DATE       |
| mm                                                                                              |                                                                                       |                                                                                          |             |     |            |