



| File No. | 689QG28802 | SHEET | 1/1 |
|---|---|---|---|

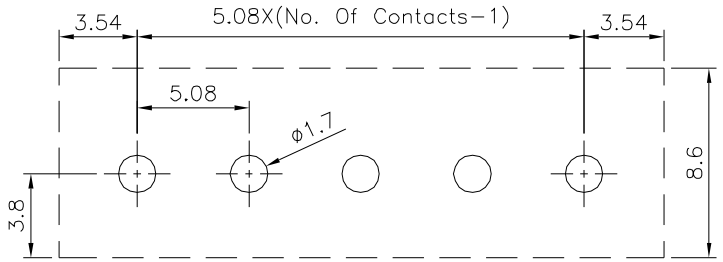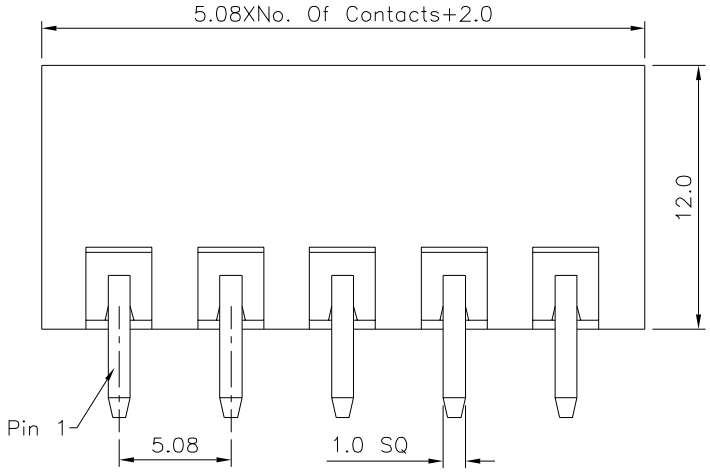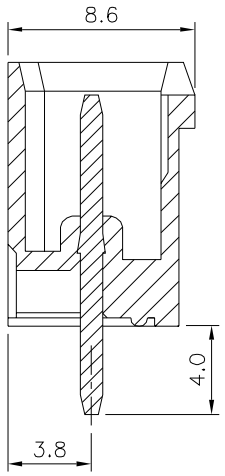

Recommended P.C.B. Layout

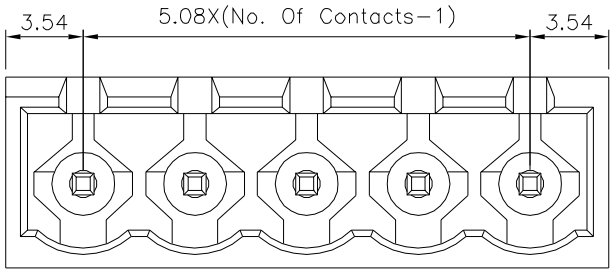


## SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC(1Minute)
Using Temperature Range:−40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V−0),Green
RoHS Compliant

**4UCON** 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | 09158 | | |
|---|---|---|---|
| SCALE | NONE | REV. | B0 |

| APPROVED BY | Jason Wu |
|---|---|
| CHECKED BY | Leo Han |
| DRAWING BY | Michelle Lee |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°
UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| △0 | B0 | NEW RELEASE | HZF | 06/01/2025 |