


File No.	6890H09801	SHEET	1/1

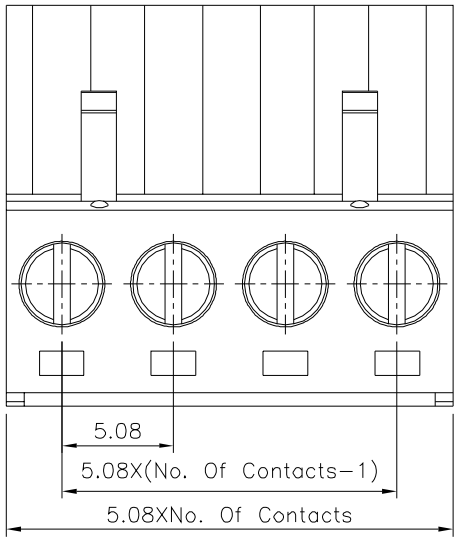

SPECIFICATION
Current Rating:16A/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Operation Temperature:−40°C~+105°C
Wire Range:12~26 AWG
Torque:5.0 Kgf.cm/M3
Insulator Body:Polyamide(UL94V−0),Green
Contact:Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
Screw:Steel,Galvanized With Cr3+ Plated
RoHS Compliant

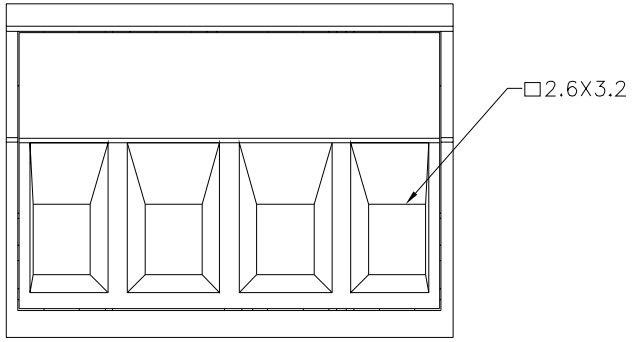

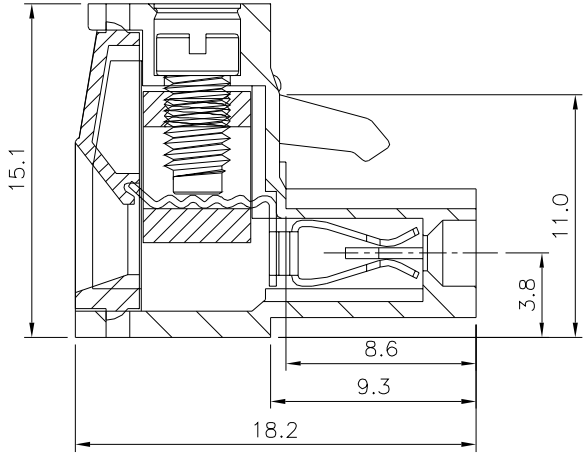

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
09177	Jason Wu	X. ±0.50
	CHECKED BY Leo Han	.X ±0.30
	DRAWING BY Michelle Lee	.XX ±0.20
SCALE NONE	REV. B0	ANG. ±1°
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	B0	NEW RELEASE	HZF	07/25/2024