



| File No. | 561KJ22806 | SHEET | 1/1 |
|---|---|---|---|

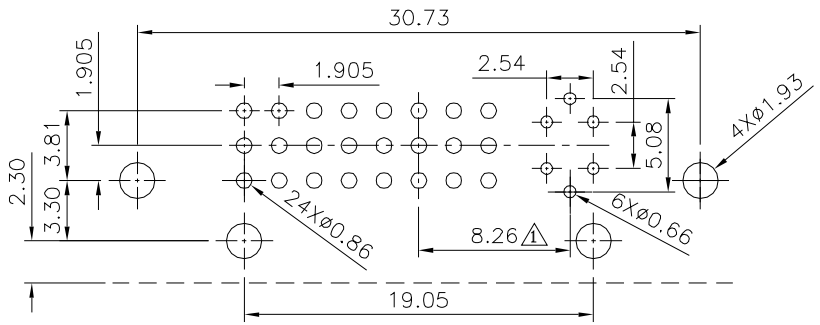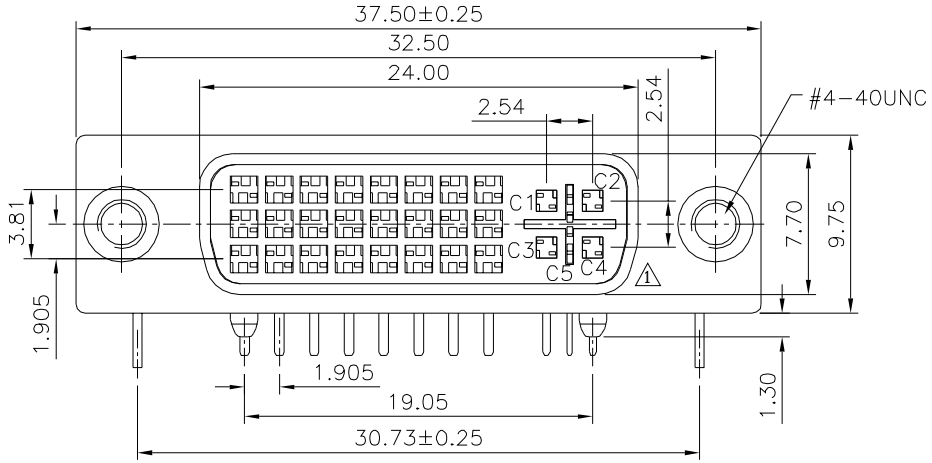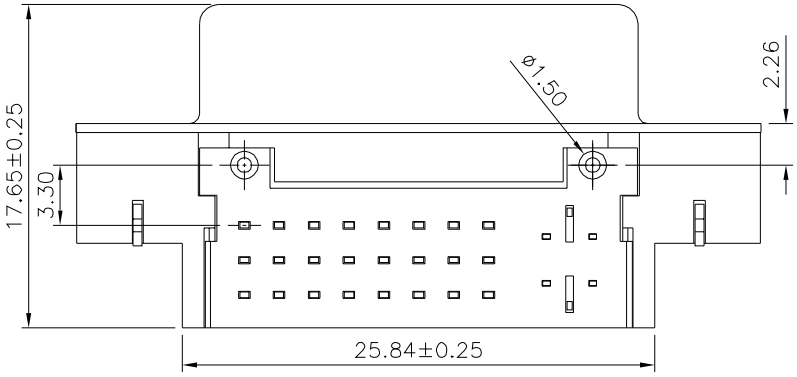

Recommended P.C.B. Layout

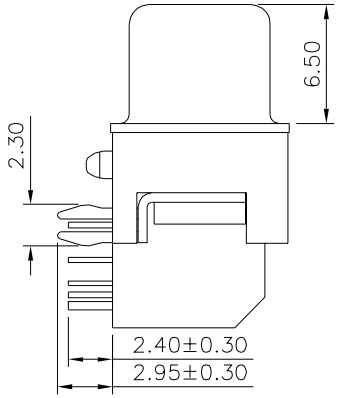


## SPECIFICATION

Dielectric Withstanding Voltage:500V AC
1 Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Operation Temperature:-20°C~+85°C
Housing:PBT+30%G.F.(UL94V-0),White
Cover:PA66+30%G.F.(UL94V-0),White
Contact:Brass,Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
Shell:Steel,Nickel Plated Over Copper
Boardlock:Steel,Tin Plated
Rivet:Copper Alloy,Nickel Plated
RoHS Compliant

**4UCON** 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | APPROVED BY | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |
|---|---|---|
| 09401 | EMILY | .X ±0.38 1 .X° ±3° |
| | CHECKED BY HZF | .XX ±0.25 .XX° ±1° |
| | DRAWING BY SONG | .XXX ±0.05 .XXX° ±0.5° |
| SCALE NONE | REV. A1 | UNIT mm |

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 1 | A1 | Modify Data | HZF | 10/22/2020 |
| 0 | A0 | NEW RELEASE | HZF | 02/07/2012 |