

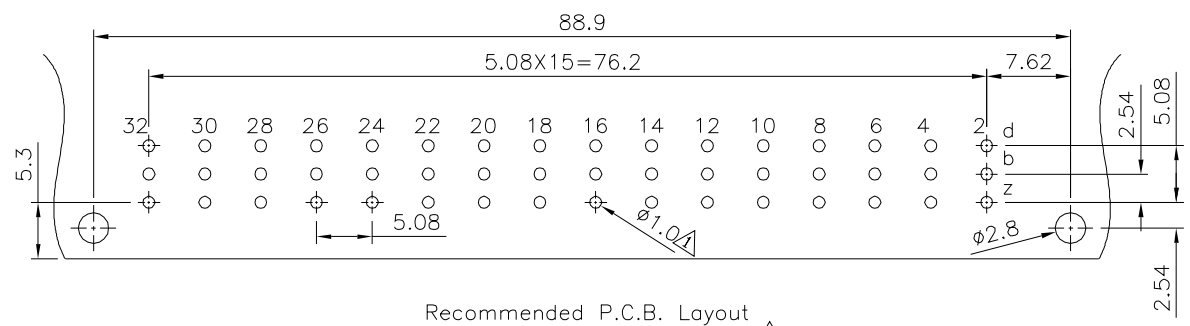


3/2/1 SPECIFICATION

Current Rating: 5.6 Amp
 Dielectric Withstanding Voltage: 1550V AC For 1 Minute
 Contact Resistance: 15 Milliohms Max. At 100mA DC
 Insulation Resistance: 1000 Megaohms Min. At 500V DC
 Operation Temperature: -55°C ~ +125°C
 Housing: PBT+G.F. (UL94V-0)
 Contact: Brass
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 RoHS Compliant

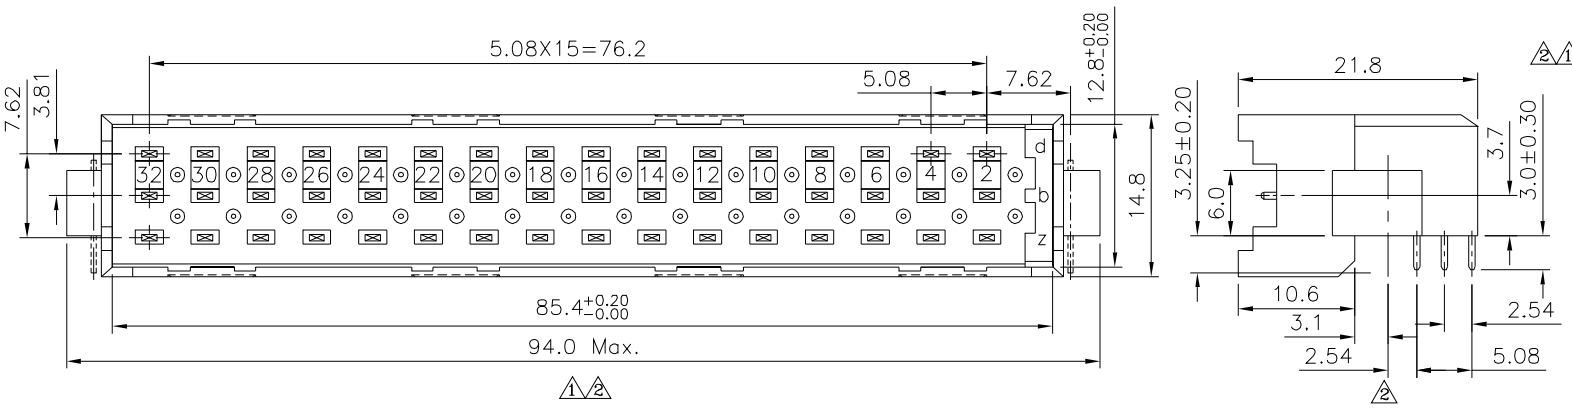

Recommended P.C.B. Layout
 (PCB Board Tolerance ±0.05)

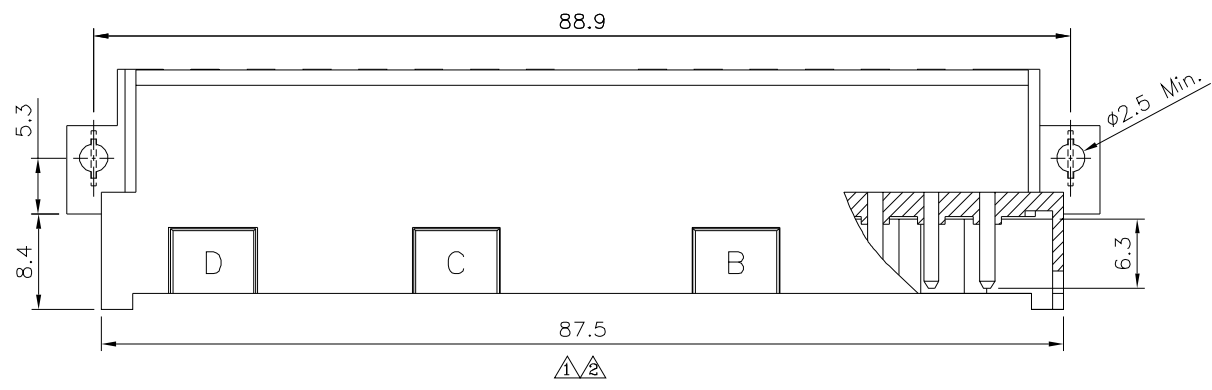

Pitch	Position	Rows With Contacts	Contact Arrange
5.08mm	16	z - -	
	32	z - d	
	48	z b d	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
09583		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		CYP	
SCALE	NONE	REV.	B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.15

NO.	REV.	REVISIONS	CHK	DATE
3	B3	Modify Data	HZF	10/06/2016
2	B2	Modify Data	HZF	06/13/2013
1	B1	Modify Data	HZF	11/10/2010
0	B0	NEW RELEASE	BECKY	03/24/2006