
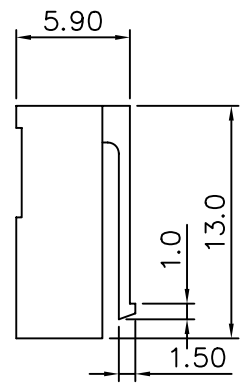
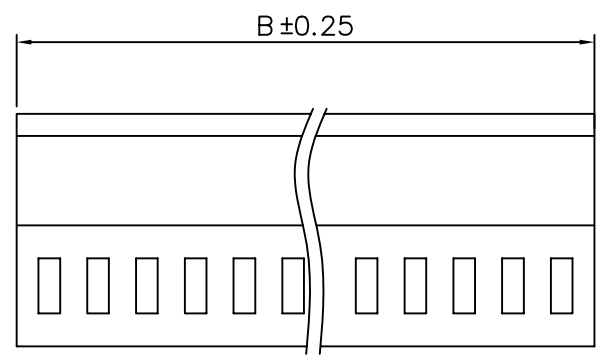


**SPECIFICATION:**  
 Current Rating: 3A  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 800V AC/Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megohms Min.  
 Temperature Range: -25°C to +85°C  
 Insulator: P.B.T UL 94V-0

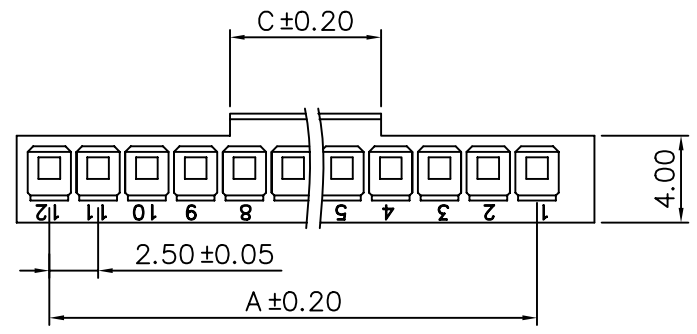

| Poles | Dimension : mm |       |       | PCS/Bag |
|-------|----------------|-------|-------|---------|
|       | A              | B     | C     |         |
| 2     | 2.50           | 5.50  | 2.00  | 1000    |
| 3     | 5.00           | 8.00  | 2.50  | 1000    |
| 4     | 7.50           | 10.50 | 5.00  | 1000    |
| 5     | 10.00          | 13.00 | 5.00  | 1000    |
| 6     | 12.50          | 15.50 | 6.00  | 1000    |
| 7     | 15.00          | 18.00 | 8.00  | 500     |
| 8     | 17.50          | 20.50 | 10.00 | 500     |
| 9     | 20.00          | 23.00 | 10.00 | 500     |
| 10    | 22.50          | 25.50 | 10.00 | 500     |
| 11    | 25.00          | 28.00 | 11.00 | 500     |
| 12    | 27.50          | 30.50 | 11.00 | 500     |
| 13    | 30.00          | 33.50 | 13.00 | 500     |
| 14    | 32.50          | 35.50 | 13.00 | 500     |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 09630

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.15  
 .XXX ±0.08

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE