
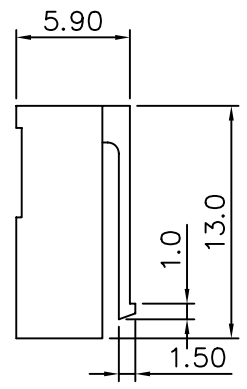
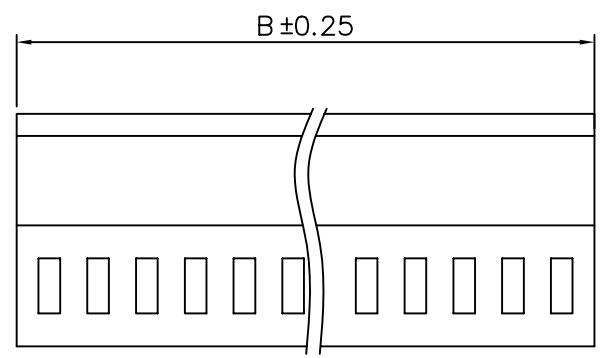


**SPECIFICATION:**  
 Current Rating: 3A  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 800V AC/Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megohms Min.  
 Temperature Range: -25°C to +85°C  
 Insulator: P.B.T UL 94V-0

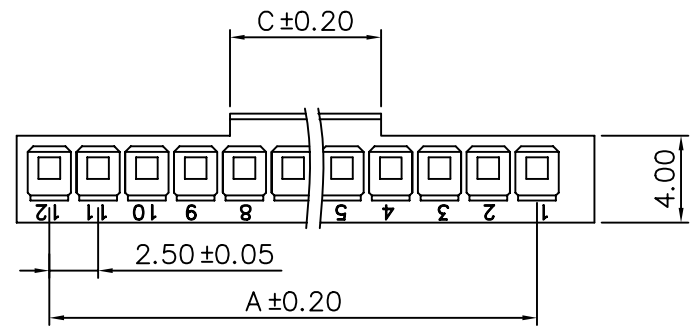

Poles	Dimension : mm			PCS/Bag
	A	B	C	
2	2.50	5.50	2.00	1000
3	5.00	8.00	2.50	1000
4	7.50	10.50	5.00	1000
5	10.00	13.00	5.00	1000
6	12.50	15.50	6.00	1000
7	15.00	18.00	8.00	500
8	17.50	20.50	10.00	500
9	20.00	23.00	10.00	500
10	22.50	25.50	10.00	500
11	25.00	28.00	11.00	500
12	27.50	30.50	11.00	500
13	30.00	33.50	13.00	500
14	32.50	35.50	13.00	500

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 09633

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.15  
 .XXX ±0.08

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE