

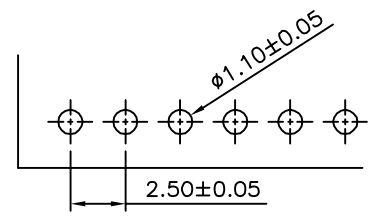
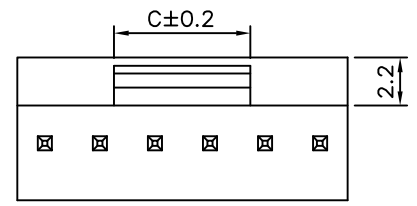


△ SPECIFICATION
 Insulator:PBT+30%G.F.(UL94V-0)
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

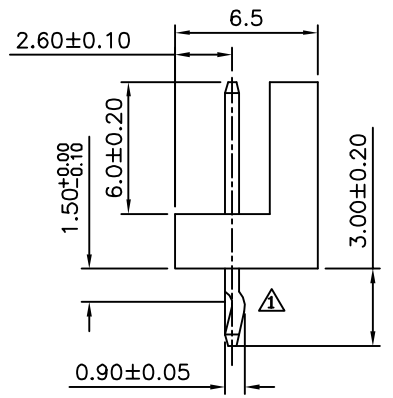

P.C.B Layout

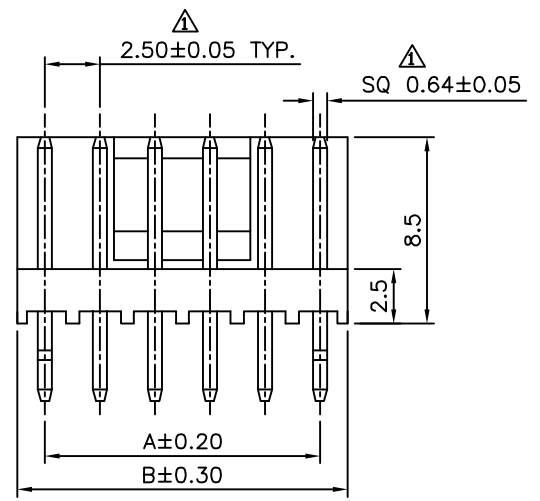

Pin	A	B	C
2	2.5	5.0	2.2
3	5.0	7.5	2.7
4	7.5	10.0	5.2
5	10.0	12.5	5.2
6	12.5	15.0	6.2
7	15.0	17.5	8.2
8	17.5	20.0	10.2
9	20.0	22.5	10.2
10	22.5	25.0	10.2
11	25.0	27.5	11.2
12	27.5	30.0	11.2
13	30.0	32.5	13.2
14	32.5	35.0	13.2

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.08
09639		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HTP		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	03/09/2012
△ A0		NEW RELEASE		