

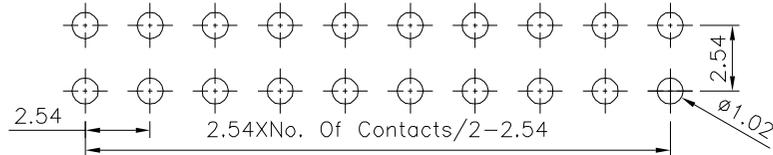
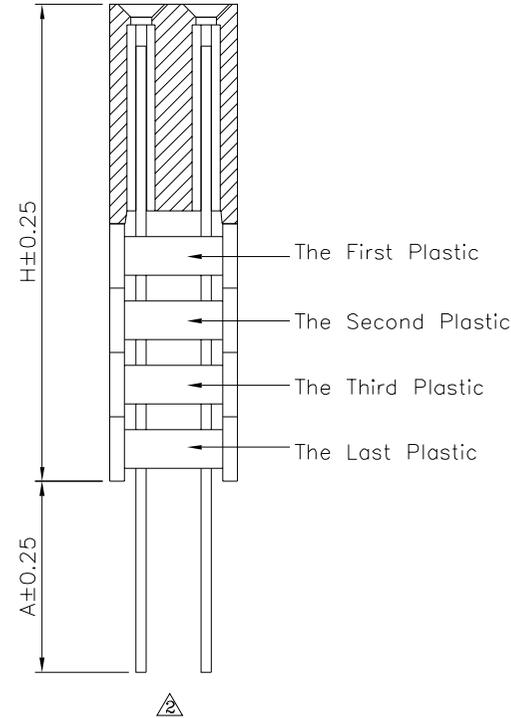


SPECIFICATION

Current Rating:3A
 ⚠ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operating Temperature:-40°C~+105°C
 ⚠ Insulator:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

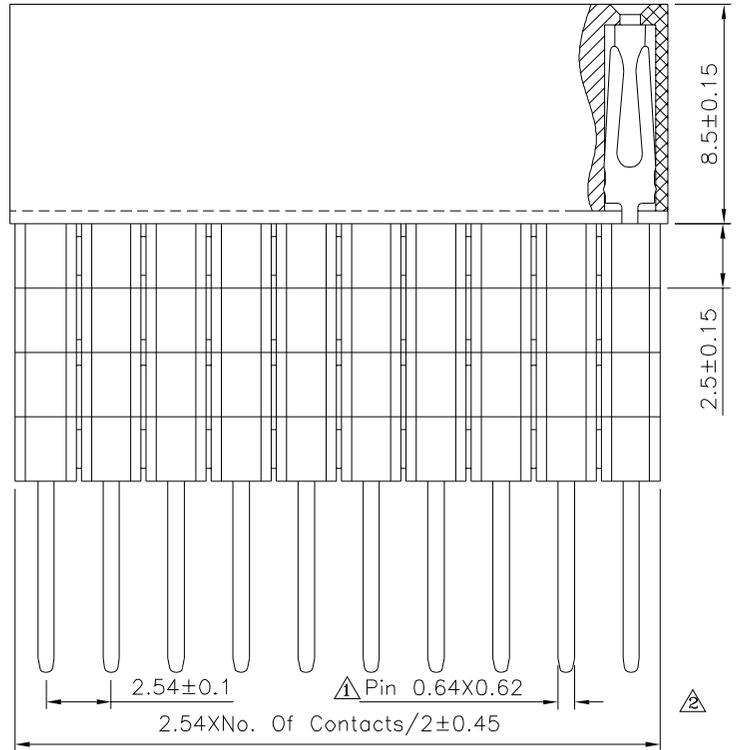

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

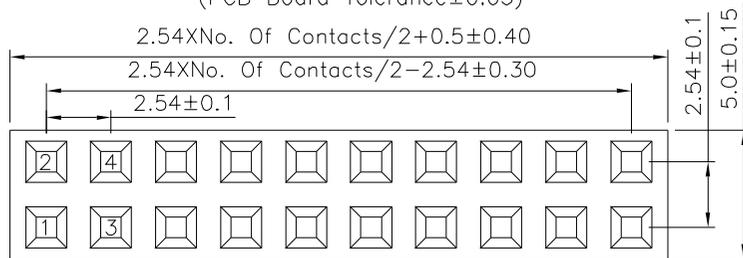

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

09664

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

SCALE

NONE

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△x ±0.30 x: ±2°
 .x ±0.25 .x: ±1.5°
 .xx ±0.20 .xx: ±1.0°
 .xxx ±0.15 .xxx: ±0.5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	01/26/2024
△A1		Modify Data	HZF	12/20/2023
△A0		NEW RELEASE	HZF	05/03/2014