
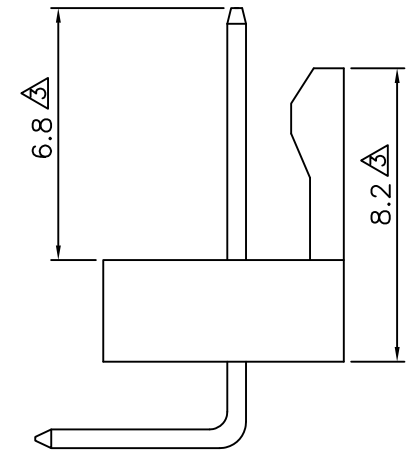


**SPECIFICATIONS**  
 △ Current Rating:3A AC,DC  
 Voltage Rating:250V AC,DC  
 Withstanding Voltage:1500V AC/Minute  
 Ambient Temperature Range:-40°C To +105°C  
 Features:2~20 Circuits Available  
 Insulator:Nylon66,UL94V-0  
 Pin:Brass,Tin Plated  
 Standard Color:Brown

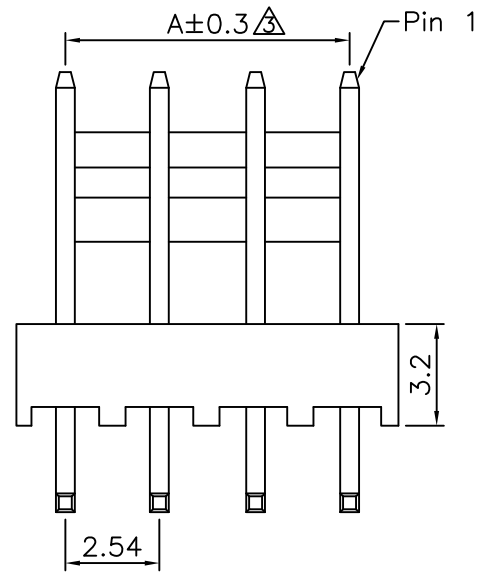

Circuits	Dimensions	
	A	B
2P	2.54	5.08
3P	5.08	7.62
4P	7.62	10.16
5P	10.16	12.70
6P	12.70	15.24
7P	15.24	17.78
8P	17.78	20.32
9P	20.32	22.86
10P	22.86	25.40
11P	25.40	27.94
12P	27.94	30.48
13P	30.48	33.02
14P	33.02	35.56
15P	35.56	38.10
16P	38.10	40.64
17P	40.64	43.18
18P	43.18	45.72
19P	45.72	48.26
20P	48.26	50.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.05
09942		MEI		
		BECKY		
		DRAWING BY		UNIT
		HZF		mm
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Dim	HZF	09/24/2007
△	A2	Update Specifications	HZF	09/24/2007
△	A1	Modify Dim. 29.7 → 27.94	MEI	2004/04/23
△	A0	NEW RELEASE	BECKY	2004/02/26