
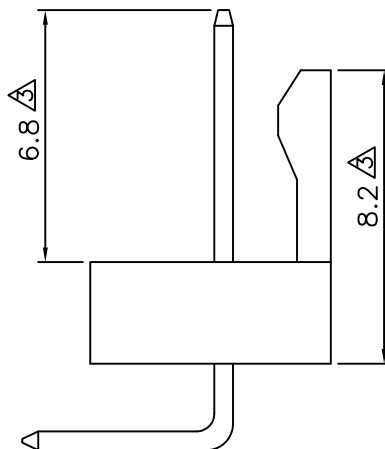


SPECIFICATIONS
 △ Current Rating: 3A AC, DC
 Voltage Rating: 250V AC, DC
 Withstanding Voltage: 1500V AC/Minute
 Ambient Temperature Range: -40°C To +105°C
 Features: 2~20 Circuits Available
 Insulator: Nylon66, UL94V-0
 Pin: Brass, Tin Plated
 Standard Color: Brown

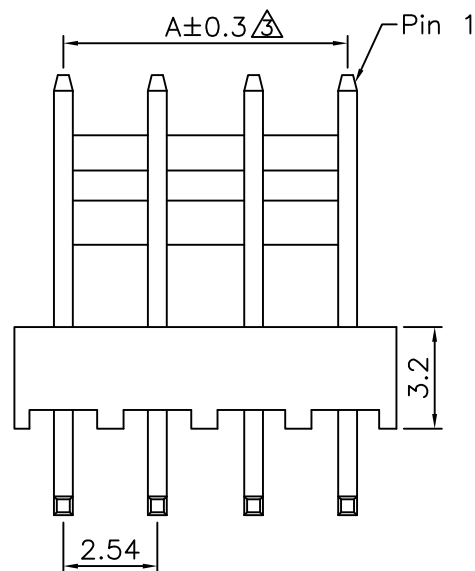

Circuits	Dimensions	
	A	B
2P	2.54	5.08
3P	5.08	7.62
4P	7.62	10.16
5P	10.16	12.70
6P	12.70	15.24
7P	15.24	17.78
8P	17.78	20.32
9P	20.32	22.86
10P	22.86	25.40
11P	25.40	27.94
12P	27.94	30.48
13P	30.48	33.02
14P	33.02	35.56
15P	35.56	38.10
16P	38.10	40.64
17P	40.64	43.18
18P	43.18	45.72
19P	45.72	48.26
20P	48.26	50.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09947


APPROVED BY
 MEI
 CHECKED BY
 BECKY
 DRAWING BY
 HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 .XXX ±0.05
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Dim	HZF	09/24/2007
△ A2		Update Specifications	HZF	09/24/2007
△ A1		Modify Dim. 29.7 → 27.94	MEI	2004/04/23
△ A0		NEW RELEASE	BECKY	2004/02/26

SCALE NONE

REV. A2



NO. REV. REVISIONS CHK DATE