
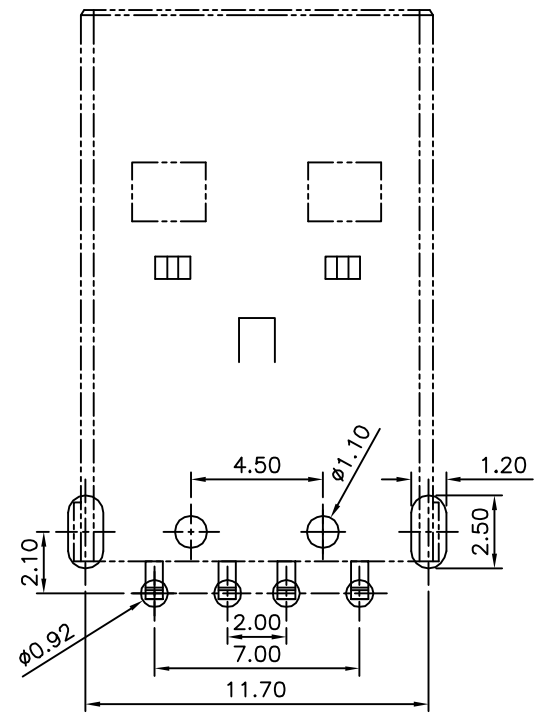
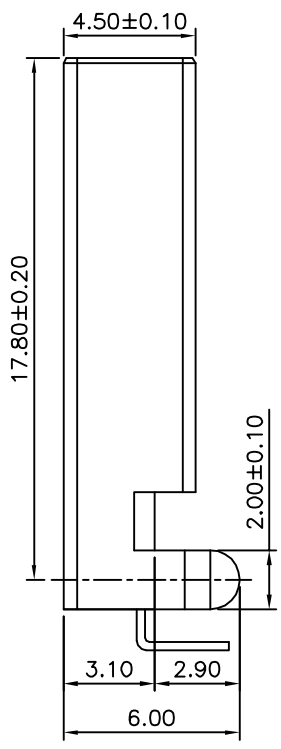
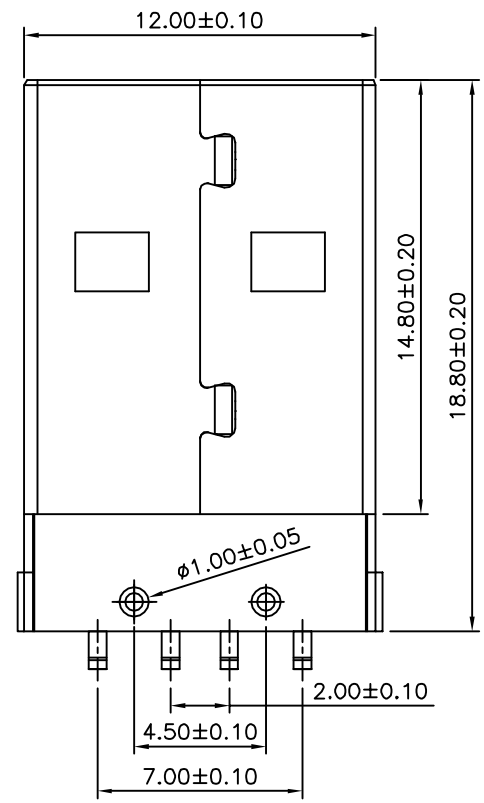


**SPECIFICATION**

Current Rating: 1 Amp Max.  
 Dielectric Withstanding Voltage: 30V AC For 1 Minute  
 Insulation Resistance: 1000 Megaohms Min. At DC 500V  
 Contact Resistance: 30 Milliohms Max.  
 Temperature Range: -55°C~+105°C  
 Contact: Brass  
     Gold Flash On Contact Area, Tin  
     Plated On Solder Tails, Over Nickel  
 Shell: Cold Rolled Steel, Nickel Plated Over Copper  
 Insulator: PBT(UL94V-0), White  
 RoHS Compliant

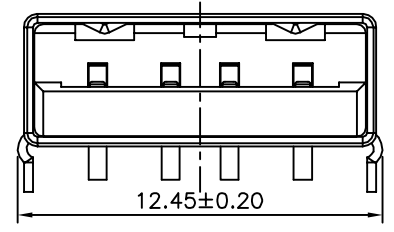

Recommended P.C.B. Layout  
 Tolerances: ±0.10

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°
10016		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		WZL		
SCALE	NONE	REV.	BO	

NO.	REV.	REVISIONS	CHK	DATE
△	BO	Modify Data	HZF	09/22/2010
△	BO	NEW RELEASE	HZF	09/22/2010