


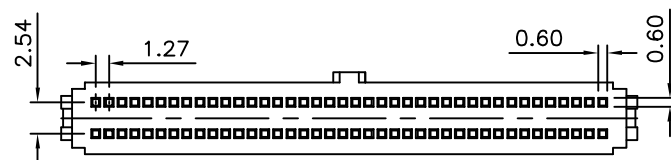

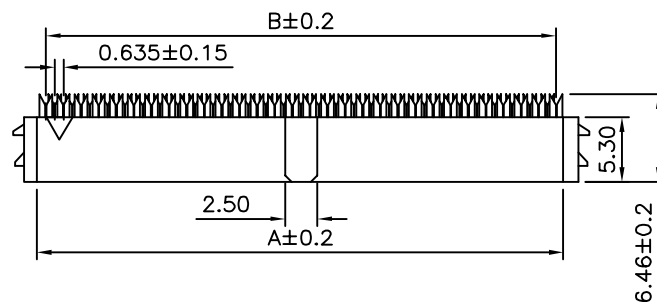




SPECIFICATION

Current Rating:1A Max.
 Insulation Resistance:500 Megaohms Min. At 50V DC
 Dielectric Withstanding Voltage:500V(RMS) AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Operation Temperature:-40°C~+85°C
 Insulation:PBT(UL94V-0),Black
 Contact:Phosphor Bronze,
 Gold Flash On Contact Area,Over Nickel
 RoHS Compliant

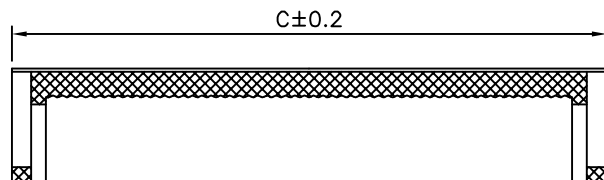

Pin	A	B	C
10	6.45	5.715	11.25
14	8.99	8.255	13.79
16	10.26	9.525	15.06
20	12.80	12.065	17.60
22	14.07	13.335	18.87
26	16.61	15.875	21.41
30	19.15	18.415	23.95
34	21.69	20.955	26.49
40	25.50	24.765	30.30
44	28.04	27.305	32.84

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10065

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.30
 .X ±0.20
 .XX ±0.10
 .XXX ±0.03

UNIT mm



NO.

REV.

B4 Modify Data

B3 Modify Data

B2 Modify Data

B1 Modify Data

B0 NEW RELEASE

REVISIONS

HZF 12/23/2014

HZF 11/26/2013

HZF 12/10/2009

HZF 07/14/2009

HZF 06/20/2009

CHK DATE