


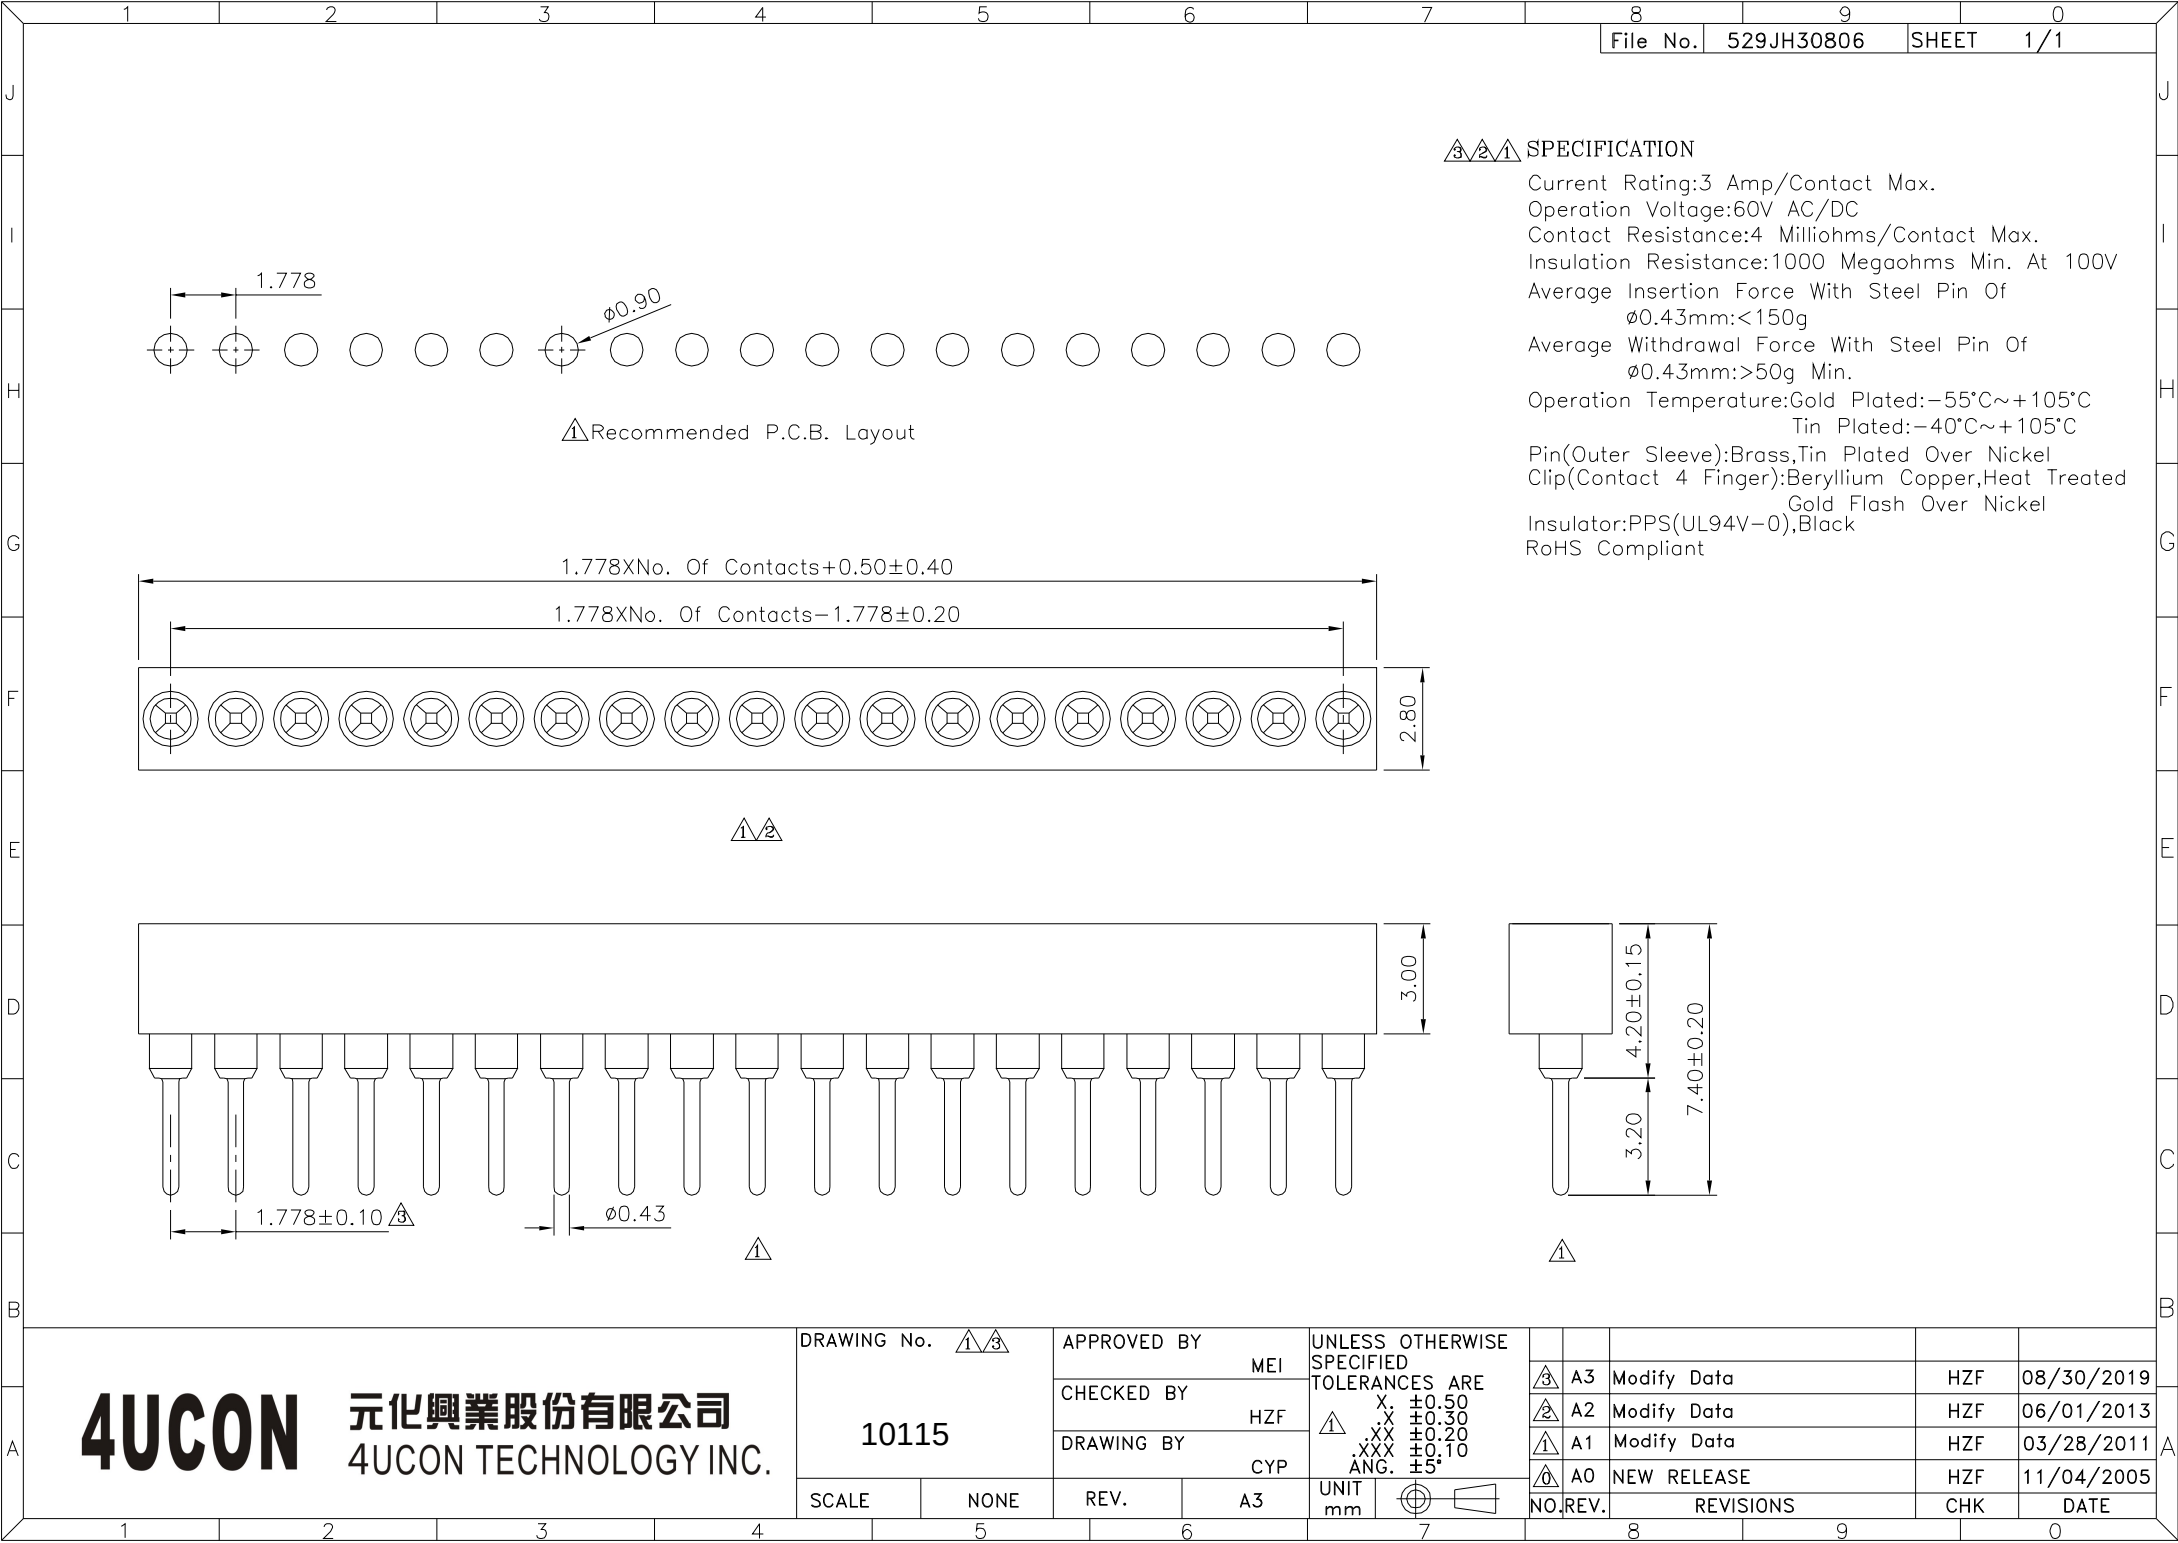

SPECIFICATION

Current Rating:3 Amp/Contact Max.
Operation Voltage:60V AC/DC
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Average Insertion Force With Steel Pin Of
0.43mm:<150g
Average Withdrawal Force With Steel Pin Of
0.43mm:>50g Min.
Operation Temperature:Gold Plated:-55°C~+105°C
Tin Plated:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper,Heat Treated
Gold Flash Over Nickel
Insulator:PPS(UL94V-0),Black
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. <u>10115</u>		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X. ±0.30 X. ±0.20 XXX ±0.10 ANG. ±5°					
		MEI			<u>3</u> A3	Modify Data	HZF	08/30/2019	
		CHECKED BY			<u>2</u> A2	Modify Data	HZF	06/01/2013	
		DRAWING BY			<u>1</u> A1	Modify Data	HZF	03/28/2011	
		CYP			<u>0</u> A0	NEW RELEASE	HZF	11/04/2005	
SCALE	NONE	REV.	A3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE