

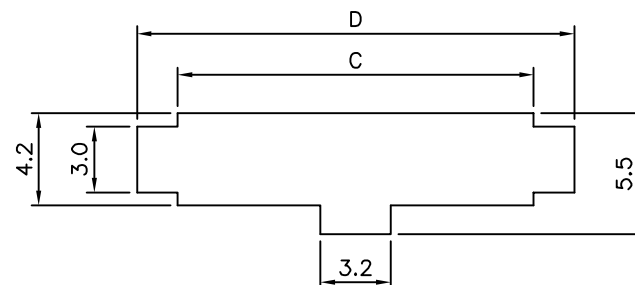
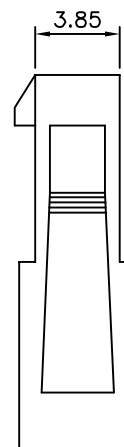


SPECIFICATION

- General Characteristics**
3.0mm Micro Fit 1XXX Plug
- Material&Finish**
Insulator:Polyester UL94V-0,Black
- Electrical Characteristics**
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
- Environmental Characteristics**
Temperature Range:-25°C~+85°C
- RoHS Compliant**

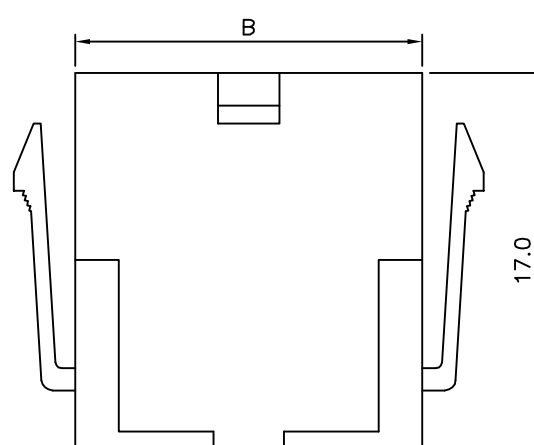

Panel Hole Dimensions

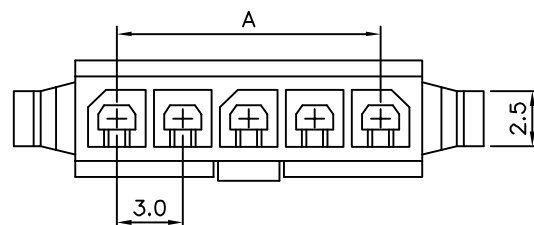

Circuits	Dim A	Dim B	Dim C	Dim D
2	3.0	6.8	7.2	10.9
3	6.0	9.8	10.2	13.9
4	9.0	12.8	13.2	16.9
5	12.0	15.8	16.2	19.9
6	15.0	18.8	19.2	22.9
7	18.0	21.8	22.2	25.9
8	21.0	24.8	25.2	28.9
9	24.0	27.8	28.2	31.9
10	27.0	30.8	31.2	34.9
11	30.0	33.8	34.2	37.9
12	33.0	36.8	37.2	40.9

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10142

APPROVED BY
MEI

CHECKED BY
HZF

DRAWING BY
LXX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38
.XX ±0.25


SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

CHK

05/30/2009

DATE