

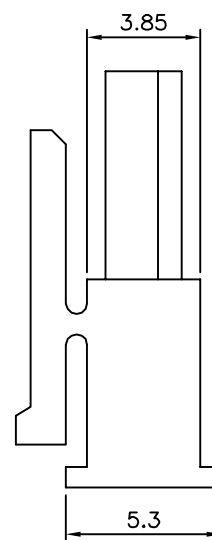
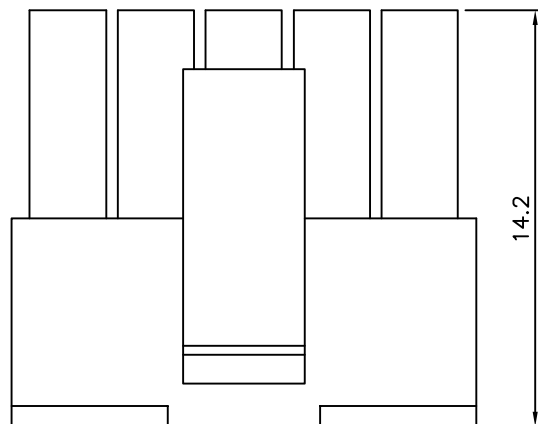


SPECIFICATION

- 1.General Characteristics**
3.0mm Micro-Fit 1XXX Receptacle
Black Insulator
- 2.Material&Finish**
Insulator:PA66(UL94V-0),Black
- 3.Electrical Characteristics**
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
- 4.Environmental Characteristics**
Temperature Range:-25°C~+85°C
- 5.RoHS Compliant**

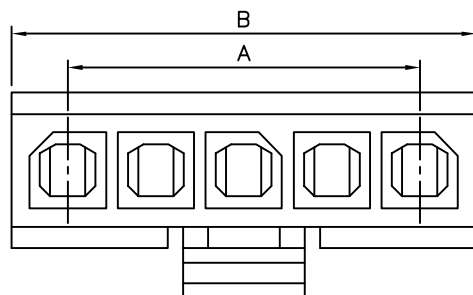

3~12 Pin

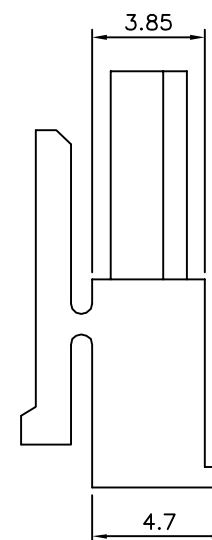

2 Pin

Pin	A	B
02	3.0	6.85
03	6.0	9.85
04	9.0	12.85
05	12.0	15.85
06	15.0	18.85
07	18.0	21.85
08	21.0	24.85
09	24.0	27.85
10	27.0	30.85
11	30.0	33.85
12	33.0	36.85

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10154

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.

UNIT
mm



NO.

REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

CHK

DATE

HZF 08/08/2013

HZF 05/30/2009