



File No.	371QD10237	SHEET	1/1

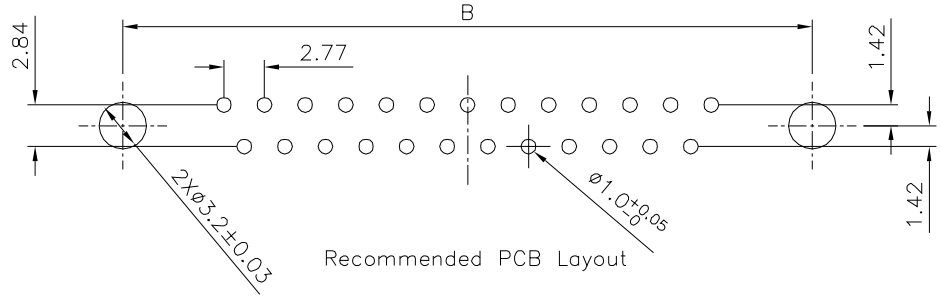

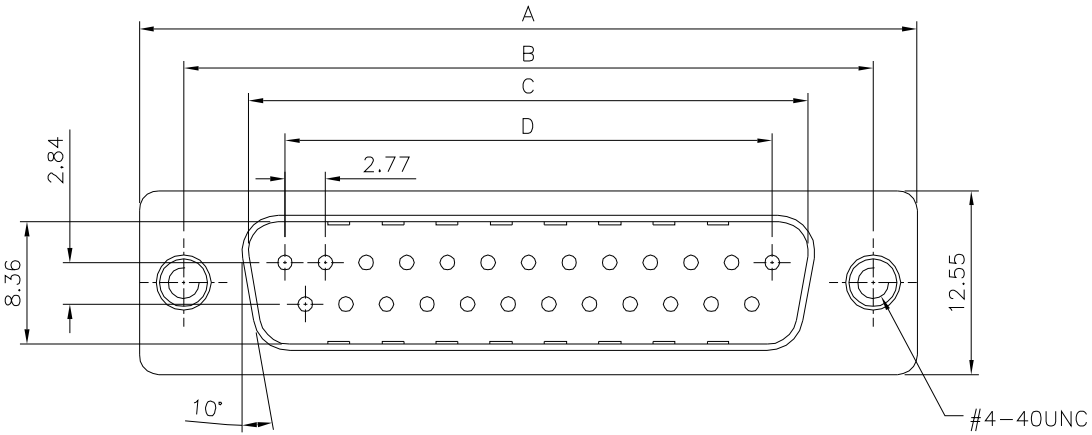

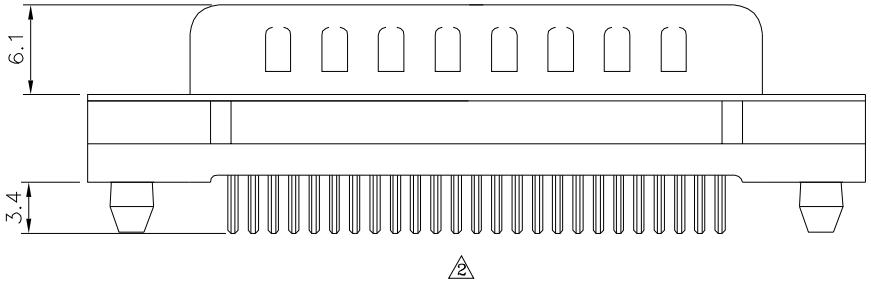

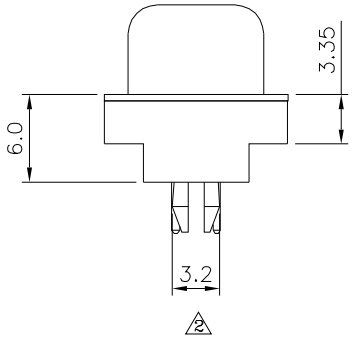

2 1 SPECIFICATION

Current Rating: 3A
Voltage Rating: 250V AC/RMS 60Hz
Contact Resistance: 20 Milliohms
Insulation Resistance: 1000 Megohms At 500V DC
Dielectric Withstanding Voltage: 1000V AC/RMS 60Hz For 1 Minute
4 3 Operation Temperature: −25°C~+85°C
3 Insulator: PBT(UL94V−0), Black
Contact: Brass, Gold Plated On Contact Area, Tin Plated On Solder Tails, Over Nickel
Shell: Steel, Tin Plated Over Copper
Boardlock: Brass, Tin Plated
RoHS Compliant

2

Pin	A	B	C	D
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. 3	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
10628	Jason Wu	X. ±0.38 X.° ±3°
	CHECKED BY Leo Han	.X ±0.25 .X° ±1.0°
	DRAWING BY Michelle Lee	.XX ±0.13
SCALE NONE	REV. B4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	B4	Modify Data	HZF	04/10/2026
3	B3	Modify Data	HZF	10/29/2016
2	B2	Modify Data	HZF	11/18/2014
1	B1	Modify Data	INGRID	11/22/2007
0	B0	NEW RELEASE	SHIN	02/07/2007