



△△ SPECIFICATION

Current Rating: 3A
Voltage Rating: 250V AC/RMS 60Hz
Contact Resistance: 20 Milliohms
Insulation Resistance: 1000 Megohms At 500V DC
Dielectric Withstanding Voltage: 1000V AC/RMS 60Hz For 1 Minute
△△ Operation Temperature: -25°C~+85°C
△△ Insulator: PBT(UL94V-0), Black
Contact: Brass, Gold Plated On Contact Area, Tin
Plated On Solder Tails, Over Nickel
Shell: Steel, Tin Plated Over Copper
Boardlock: Brass, Tin Plated
RoHS Compliant

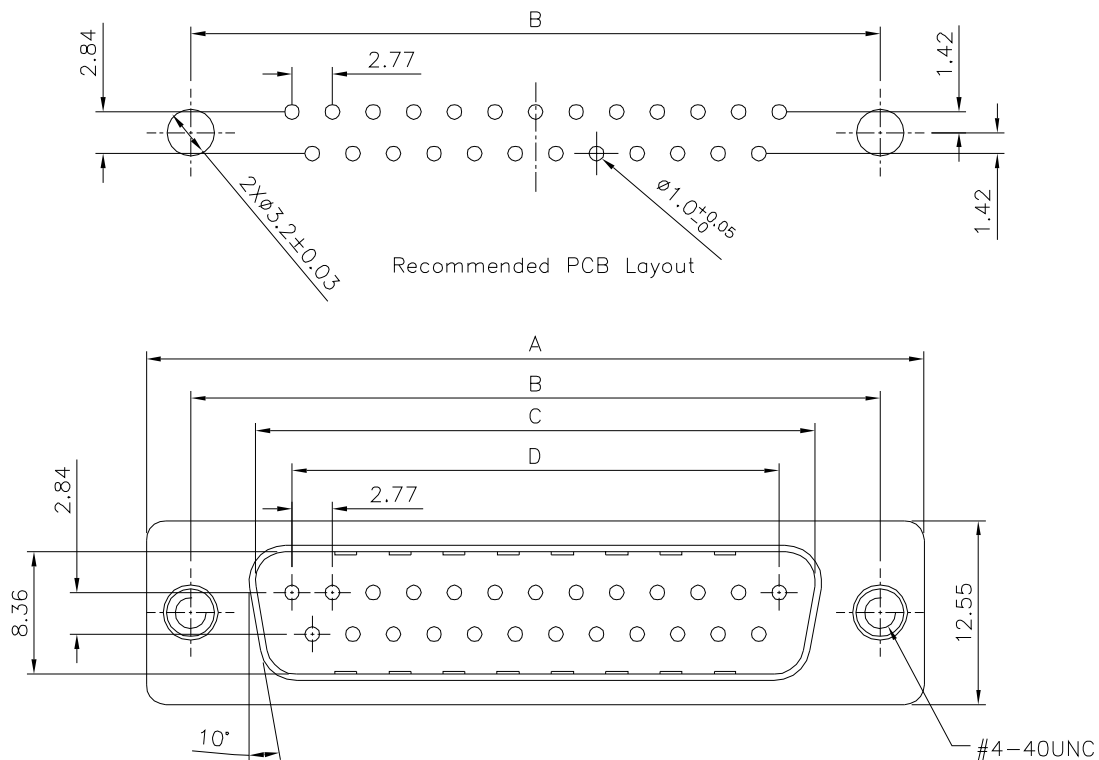

△△ Pin	A	B	C	D
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△

10632

SCALE

NONE

REV.

B4

APPROVED BY
Jason Wu


CHECKED BY
Leo Han

DRAWING BY
Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.38 X.* $\pm 3^{\circ}$
.X ± 0.25 .X.* $\pm 1.0^{\circ}$
.XX ± 0.13

UNIT
mm



△△ NO.	REV.	REVISIONS	CHK	DATE
△△ B4		Modify Data	HZF	04/10/2026
△△ B3		Modify Data	HZF	10/29/2016
△△ B2		Modify Data	HZF	11/18/2014
△△ B1		Modify Data	INGRID	11/22/2007
△△ B0		NEW RELEASE	SHIN	02/07/2007