

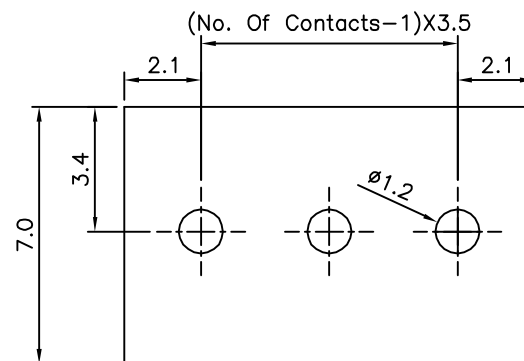
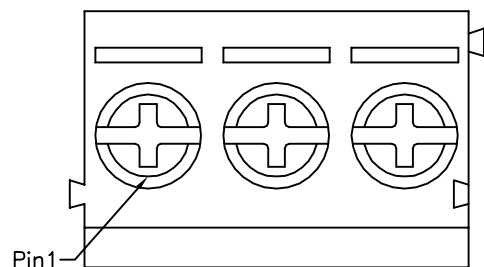


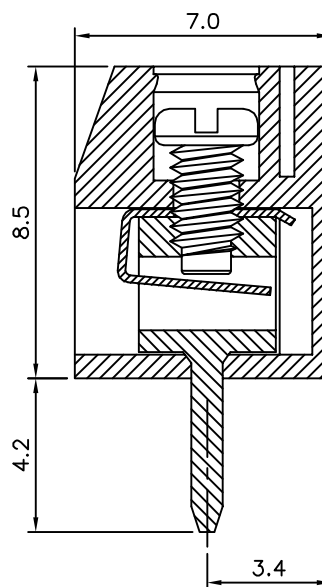

Recommended P.C.B. Layout

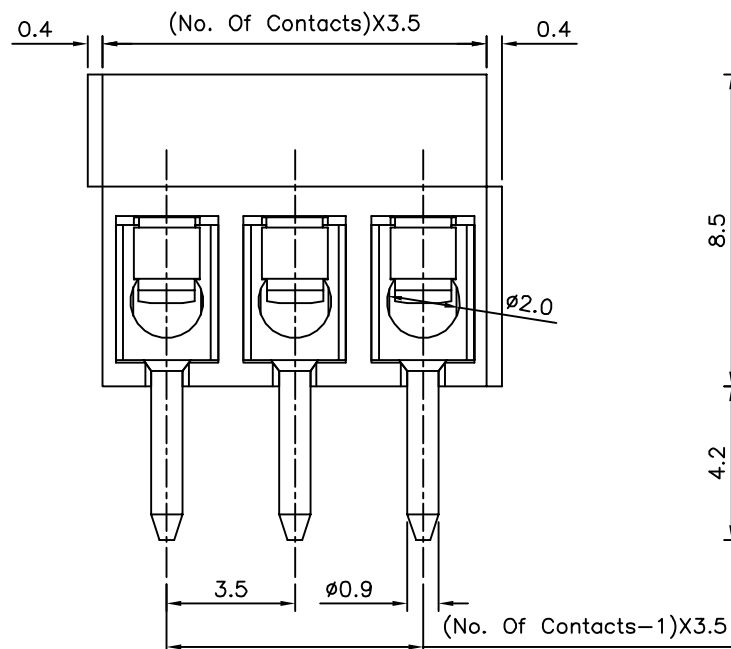

SPECIFICATION

Current Rating: 10 Amp/Way Max.

Voltage Rating: 150V AC

Withstanding Voltage: 2000V AC/Minute
Test Time=60 Sec/1 PCS

Contact Resistance: 20 Milliohms Max.

Wire Range: 16~30 AWG

Torque: 2kgf.cm/M2

Operating Temperature: -40°C~+105°C

Soldering Reliability: Test Temperature=250°C±10°C
5 Seconds Max.

Terminal: Copper Alloy, Tin Plated

Screw: Steel, Galvanized And With Cr3+ Plated

Wire Guard: Stainless Steel

Insulator Body(Housing): Polyamide(UL94V-0), Blue
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10692

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°


SCALE

NONE

REV.

B0

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ B0

NEW RELEASE

HZF

10/26/2014