

File No.	689QJ21802	SHEET	1/1

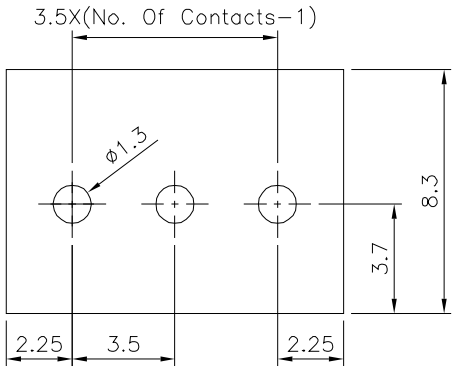



Recommended P.C.B. Layout

△3 △1 SPECIFICATION

Voltage Rating:150V AC
Current Rating:10A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:1300V AC/Minute
Wire Range:16~30 AWG
Torque:2.0 Kgf.cm/M2
Operation Temperature:−40°C~+105°C
Terminal:Copper Alloy,Tin Plated
Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Stainless Steel
△2 Insulator:Polyamide.(UL94V−0),Blue
RoHS Compliant

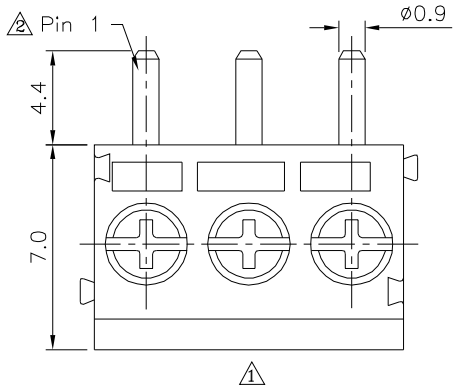

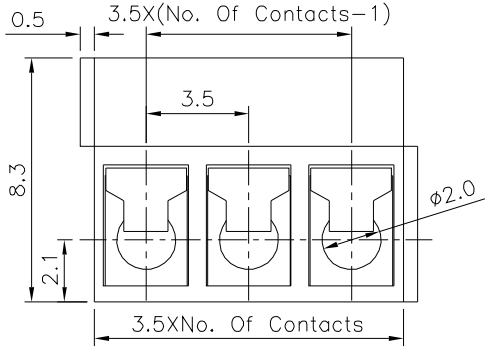

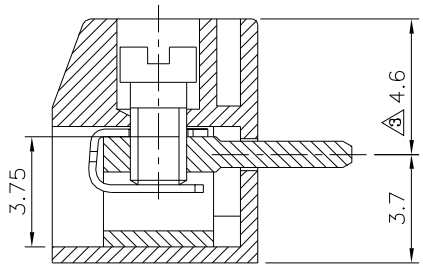

△3

Note	
Length	Tolerance
30mm	±0.30
30~60mm	±0.40
60~120mm	±0.50
120~220mm	±0.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △2	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △3
10706	Jason Wu	X. ±0.50
	CHECKED BY Leo Han	.X ±0.40
	DRAWING BY Michelle Lee	.XX ±0.30
SCALE NONE	REV. A3	X° ±1°
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	10/21/2026
△2	A2	Modify Data	HZF	12/10/2019
△1	A1	Modify Data	HZF	12/16/2014
△0	A0	NEW RELEASE	HZF	06/05/2011