
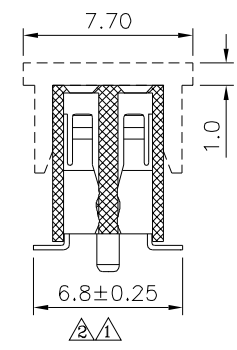
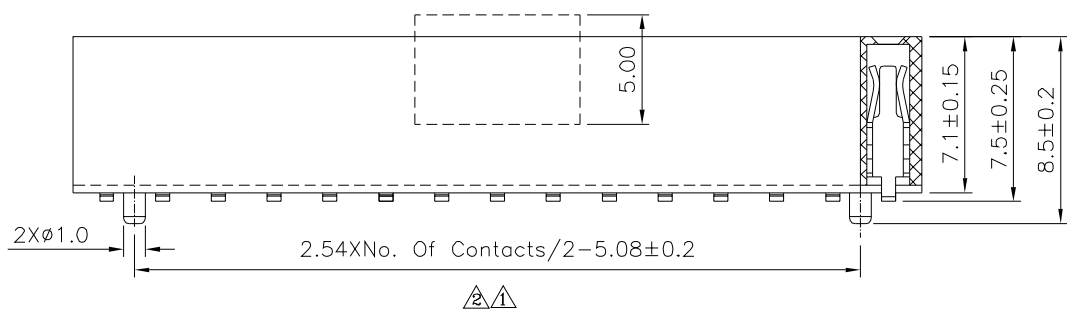


△ Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

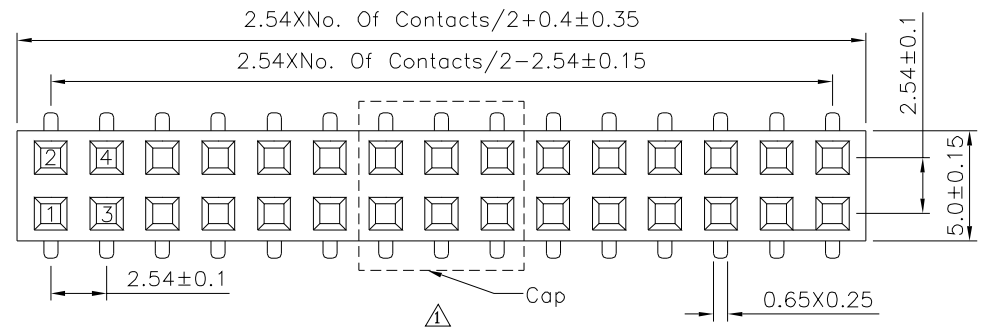

△ SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X. ±2° .X ±0.20 .X ±1.5° .XX ±0.15 .XX ±1° .XXX ±0.10 .XXX ±0.5°
10714		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	09/26/2023
△	A1	Modify Data	HZF	09/14/2023
△	A0	NEW RELEASE	HZF	05/18/2016