


Recommended P.C.B. Layout

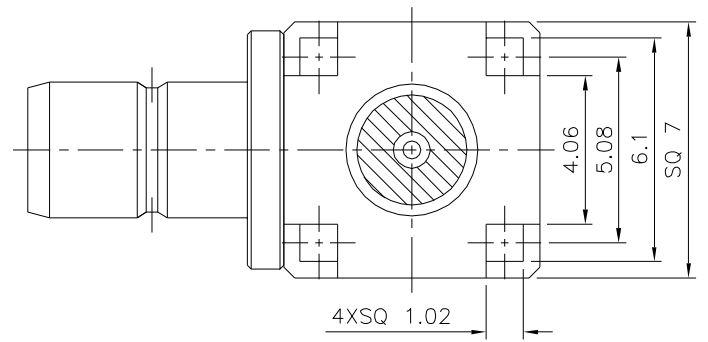

△ SPECIFICATION

Working Voltage:335V AC  
 Withstand Voltage:1000V AC/Minute  
 Insulation Resistance:1000 Megaohms Min. DC500V  
 Temperature Range:-40°C~+85°C  
 Impedance:50 Ohms  
 Frequency Range:DC 0~4GHz  
 VSWR:1.5Max.  
 Contact Resistance:Center Contact:6.0 Milliohms Max.  
 Outer Contact:1.0 Milliohms Max.  
 △Durability:500 Matings Min.  
 RoHS Compliant

05	SQ Body	Brass	1	Gold Flash Over Nickel	
04	Insulator	Teflon	1		
03	Center Pin	Brass	1	Gold Flash Over Nickel	
02	Insulator	Teflon	1		
01	Body	Brass	1	Gold Flash Over Nickel	
△	No.	Description	Material	Q'ty	Finish

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.1 △ .X ±0.1 △ .XX ±0.1
10796		MEI		
		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		
REV.	A2	UNIT	mm	△

△	A2	Modify Data	HZF	08/05/2020
△	A1	Modify Data	HZF	07/16/2015
△	A0	NEW RELEASE	HZF	11/03/2010
NO.	REV.	REVISIONS	CHK	DATE