



Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance:±0.05)


△ SPECIFICATION
 Current Rating:1.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 △ Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

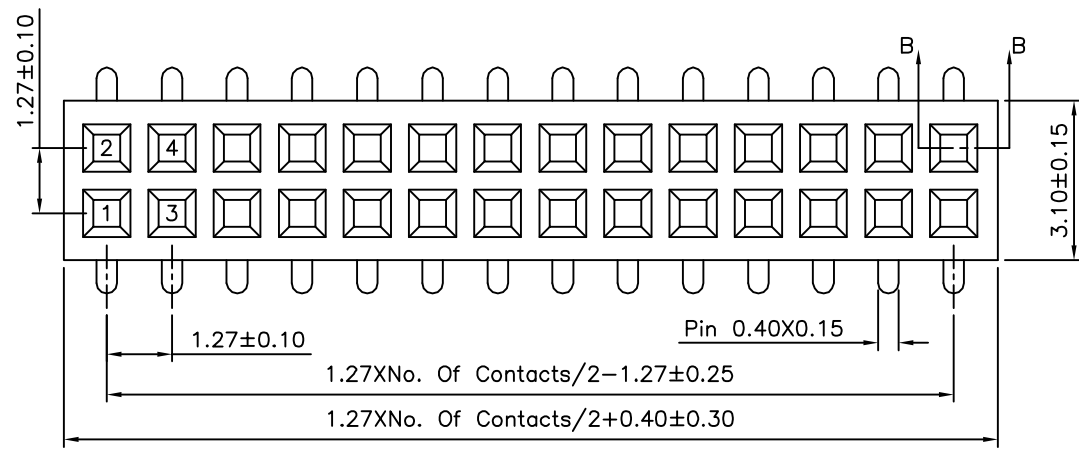

△

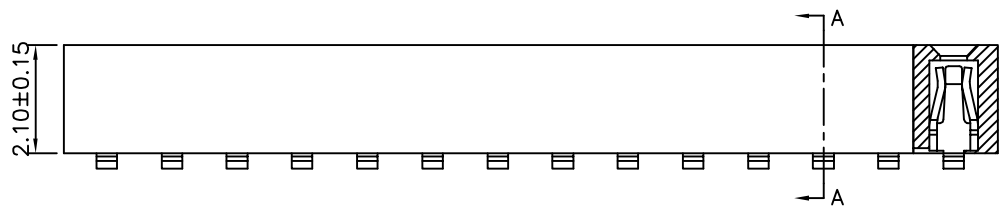

Section B-B



△ Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.40 △ .XX ±0.25 △ .XXX ±0.15 △ ANG. ±3°
10816		EMILY		
		CHECKED BY HZF		
		DRAWING BY YBL		UNIT mm
SCALE	NONE	REV.	A4	
				NO.REV.

△ A4	Modify Data	HZF	11/11/2013
△ A3	Modify Spec.	HZF	02/26/2013
△ A2	Add P/N Code	HZF	07/17/2012
△ A1	Modify Data	HZF	03/18/2010
△ A0	NEW RELEASE	BECKY	03/25/2005
NO.REV.	REVISIONS	CHK	DATE