


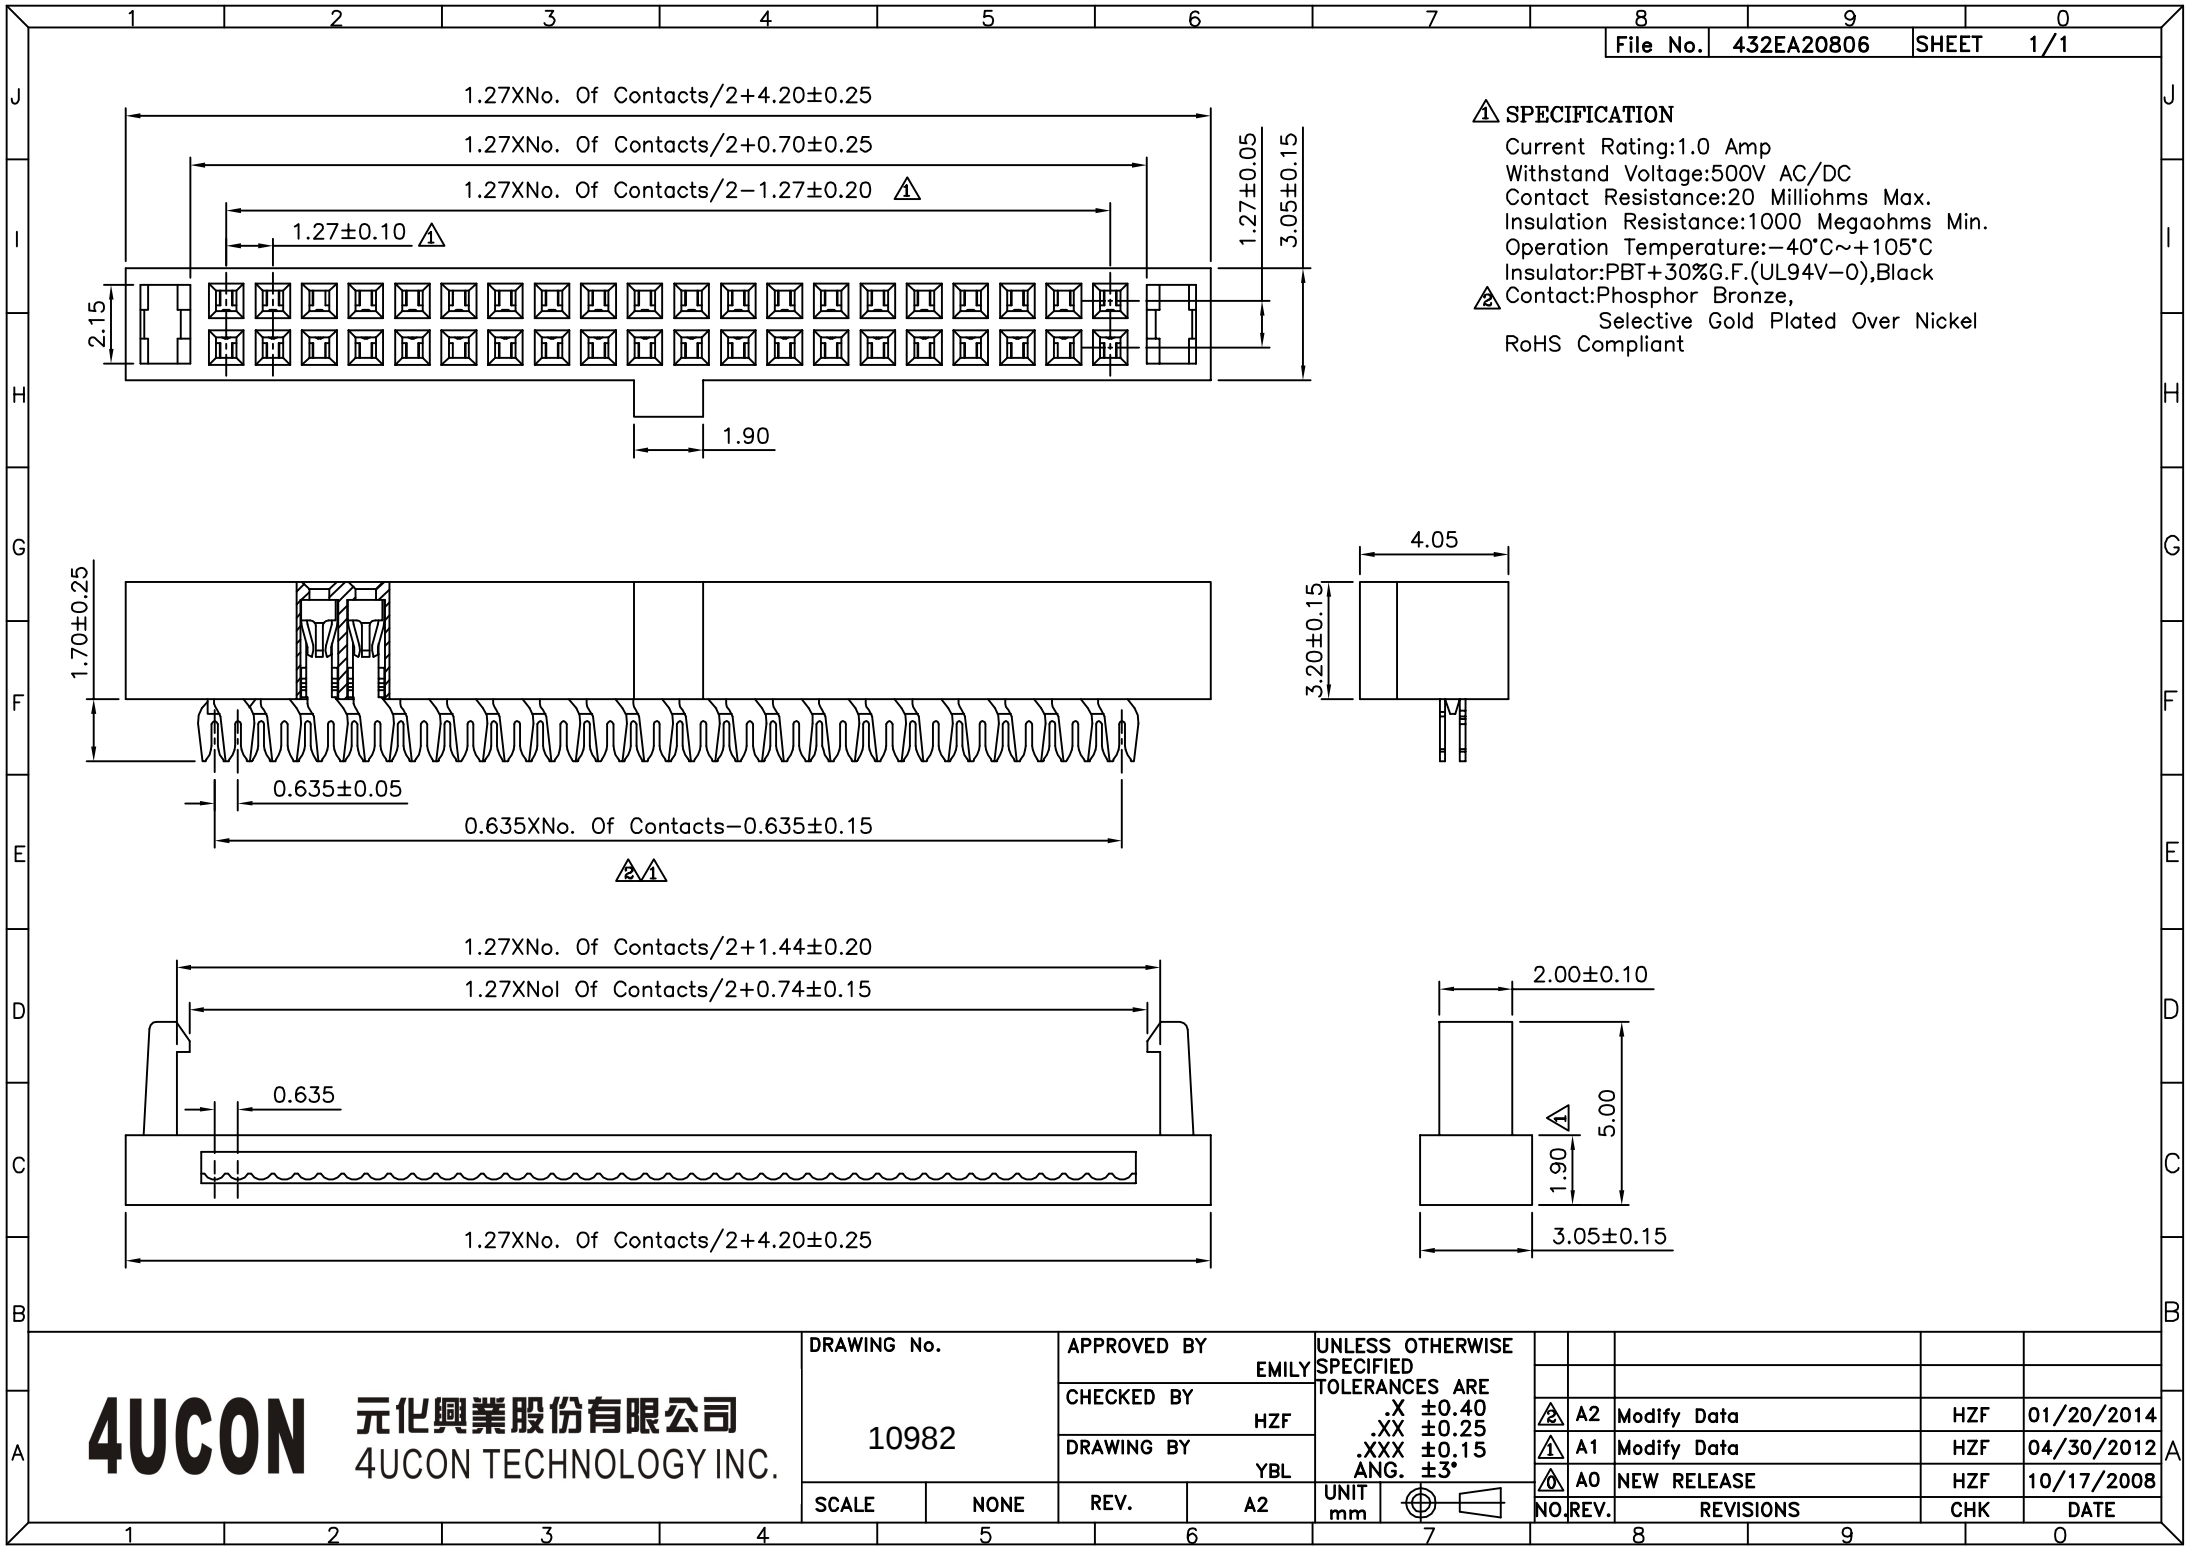

△ SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PBT+30%G.F.(UL94V-0),Black
△ Contact:Phosphor Bronze,
Selective Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10982

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

SCALE


NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



△ A2	Modify Data	HZF	01/20/2014	
△ A1	Modify Data	HZF	04/30/2012	
△ A0	NEW RELEASE	HZF	10/17/2008	
NO. REV.	REVISIONS	CHK	DATE	