


File No.	182PH13237	SHEET	1/1

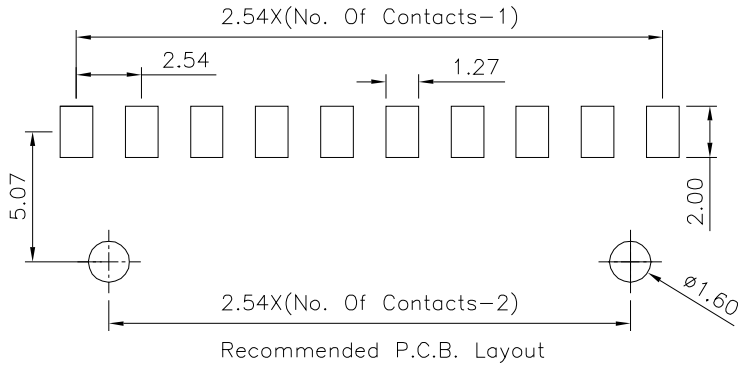



Recommended P.C.B. Layout



1X2P



1X3P

SPECIFICATION
Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:02~40 Contacts
RoHS Compliant

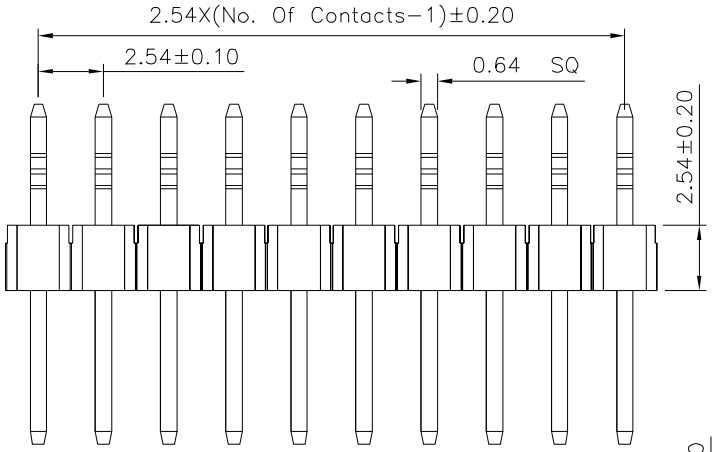

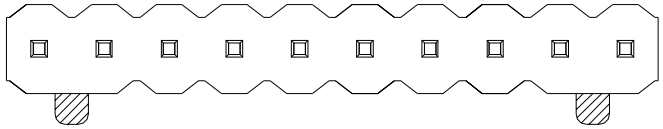
1X4~1X40P

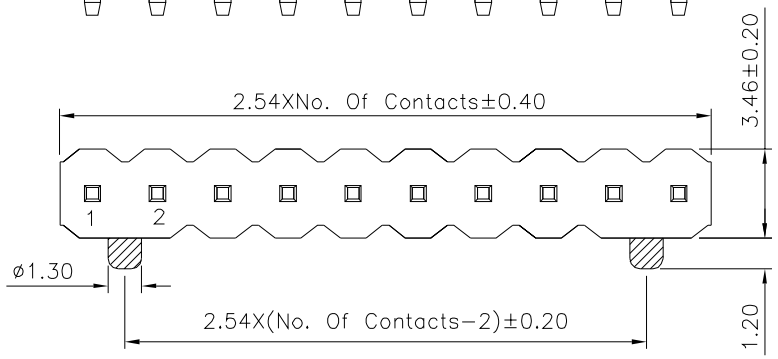

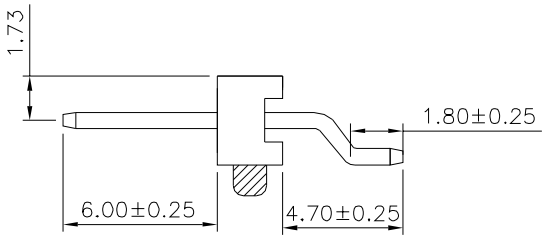

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.	DRAWING No. 11048	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05						
		CHECKED BY HZF							
		DRAWING BY CYP							
	SCALE NONE	REV. B0	UNIT mm						
				△0	B0	NEW RELEASE	HZF	02/13/2025	
				NO.	REV.	REVISIONS	CHK	DATE	