

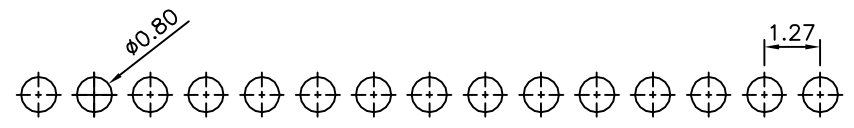
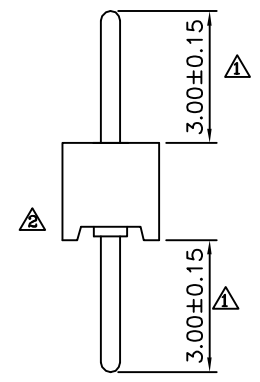


SPECIFICATION

- ⚠ Current Rating:1 Amps/Contact Max.
- ⚠ Contact Resistance:4 Milliohms/Contact Max.
- ⚠ Insulation Resistance:1000 Megaohms Min. At 500V
- ⚠ Operation Voltage:60V AC/DC
- ⚠ Withstanding Voltage:1000V AC Minute
- ⚠ Operation Temperature:-55°C~+125°C
- ⚠ Soldering Temperature:+260°C,10s Max.
- ⚠ Pin:Brass,Gold Flash Over All,Over Nickel
- ⚠ Insulator:PA46,Black
- ⚠ RoHS Compliant

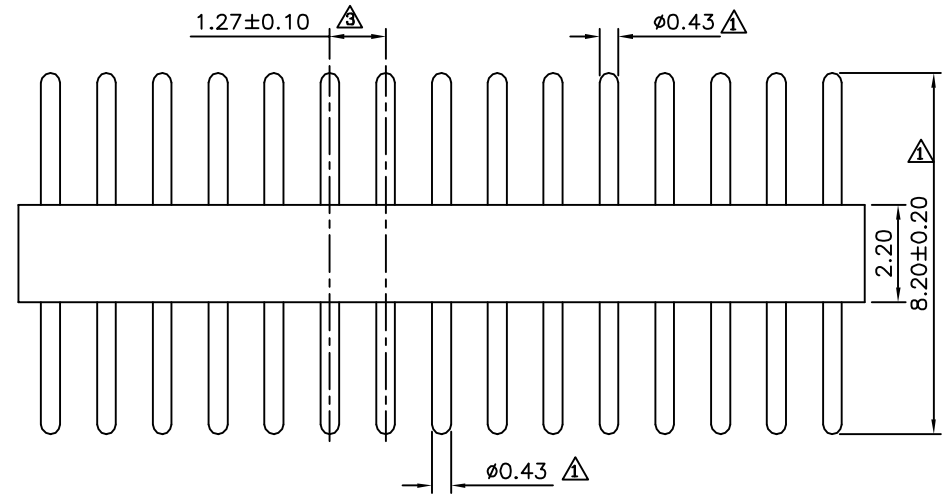

Recommended P.C.B. Layout

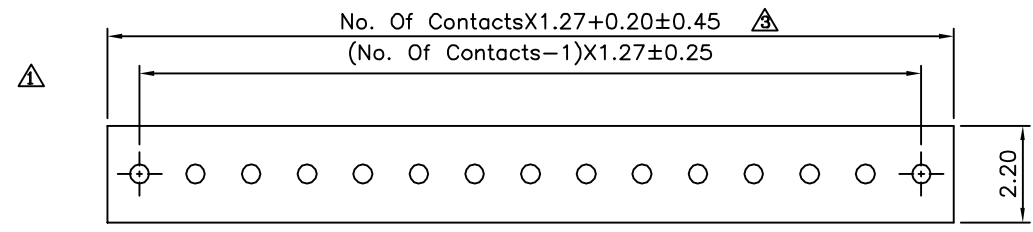

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 .XXX ±0.10 ANG. ±5°	UNIT mm	
11068		EMILY				
SCALE NONE		CHECKED BY HZF				
REV.		DRAWING BY SAN		A4		NO. REV.
A4		A4		A4		REVISIONS

⚠ A4	Modify Data	HZF	03/29/2014
⚠ A3	Modify Data	HZF	03/30/2011
⚠ A2	Modify Data	HZF	12/17/2009
⚠ A1	Modify Data	HZF	11/22/2008
⚠ A0	NEW RELEASE	HZF	11/15/2007
NO. REV.	REVISIONS	CHK	DATE