

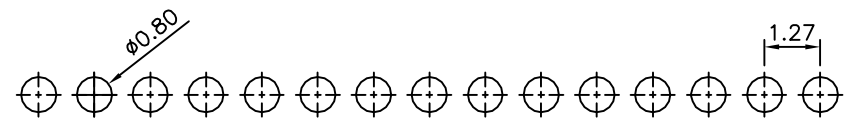
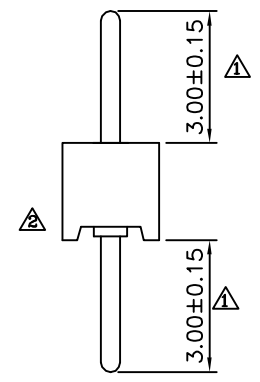


SPECIFICATION

- ⚠ Current Rating: 1 Amps/Contact Max.
- ⚠ Contact Resistance: 4 Milliohms/Contact Max.
- ⚠ Insulation Resistance: 1000 Megaohms Min. At 500V
- ⚠ Operation Voltage: 60V AC/DC
- ⚠ Withstanding Voltage: 1000V AC Minute
- ⚠ Operation Temperature: -55°C~+125°C
- ⚠ Soldering Temperature: +260°C, 10s Max.
- ⚠ Pin: Brass, Gold Flash Over All, Over Nickel
- ⚠ Insulator: PA46, Black
- ⚠ RoHS Compliant

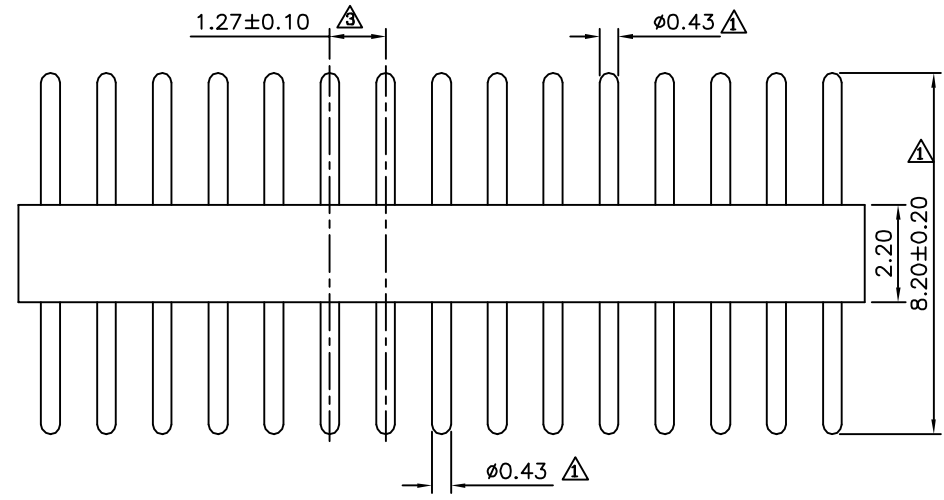

Recommended P.C.B. Layout

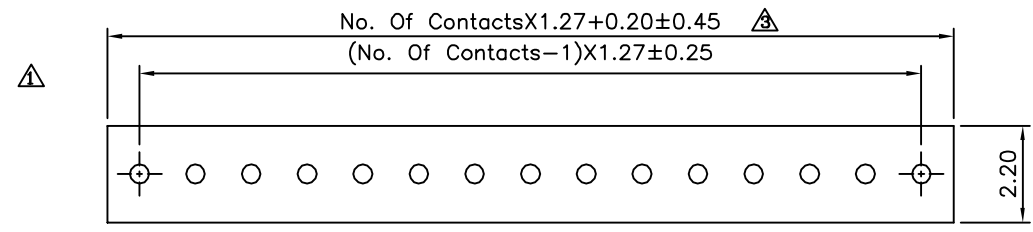

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

| | | | | | | |
|-------------|------|----------------|----|--|------------|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 .XXX ±0.10 ANG. ±5° | UNIT mm | |
| 11069 | | EMILY | | | | |
| | | CHECKED BY HZF | | | | |
| | | DRAWING BY SAN | | | | |
| SCALE | NONE | REV. | A4 | | | |

| | | | |
|----------|-------------|-----|------------|
| ⚠ A4 | Modify Data | HZF | 03/29/2014 |
| ⚠ A3 | Modify Data | HZF | 03/30/2011 |
| ⚠ A2 | Modify Data | HZF | 12/17/2009 |
| ⚠ A1 | Modify Data | HZF | 11/22/2008 |
| ⚠ A0 | NEW RELEASE | HZF | 11/15/2007 |
| NO. REV. | REVISIONS | CHK | DATE |