

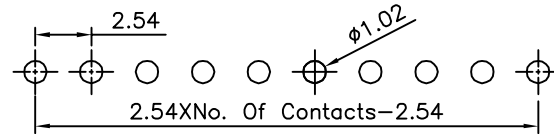
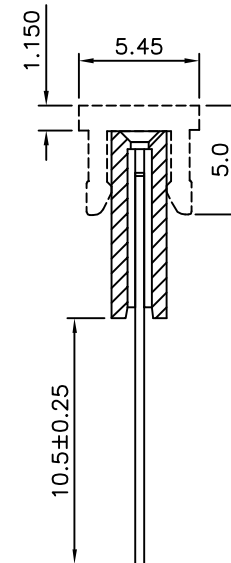


SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

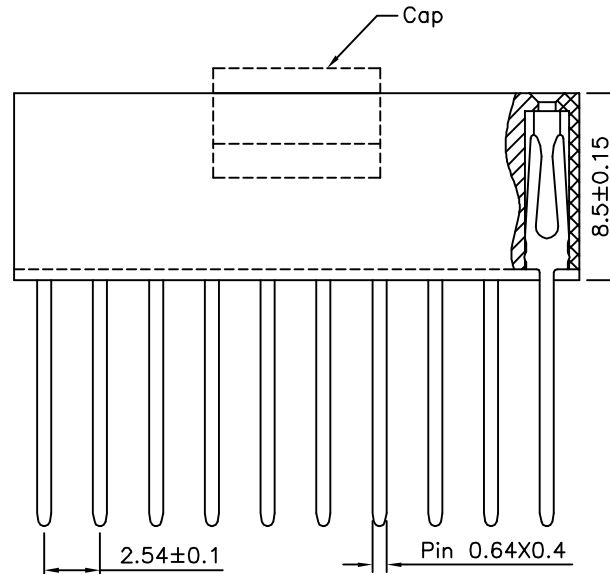

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

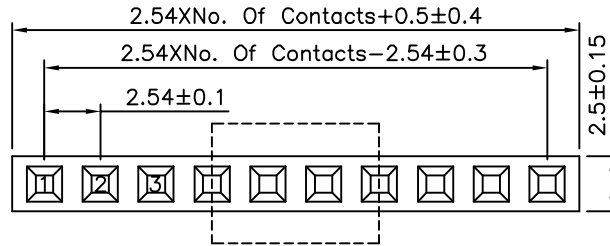

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11102

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

REV. A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A0		NEW RELEASE	HZF	12/05/2014