


File No.	182PC20237	SHEET	1/1

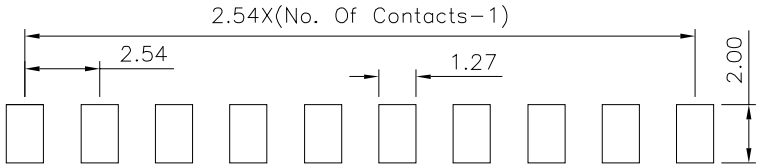


Recommended P.C.B. Layout



1X2P~1X36P




1X37P,1X38P,1X39P





1X40P

SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
⚠1 Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

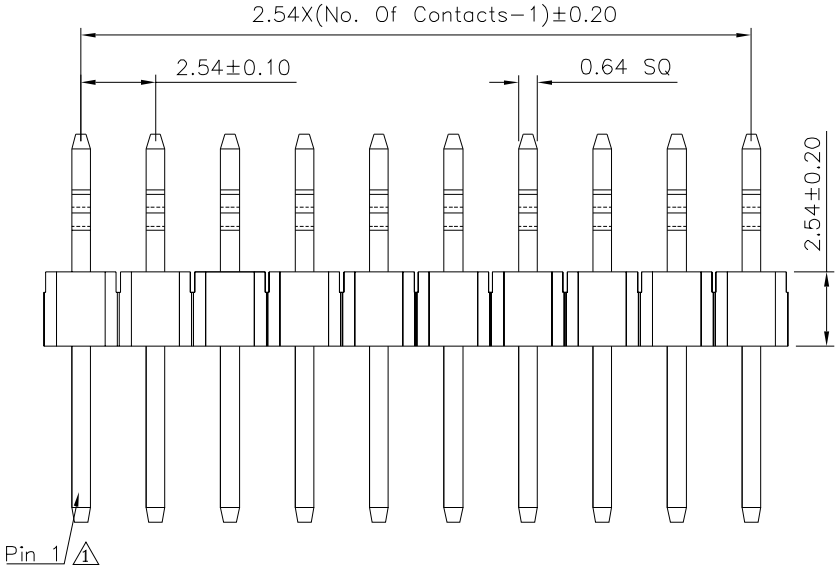

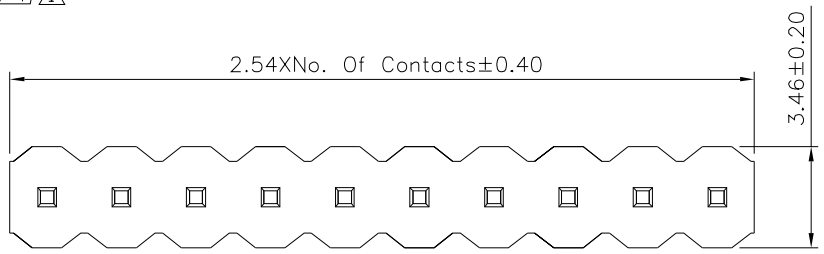

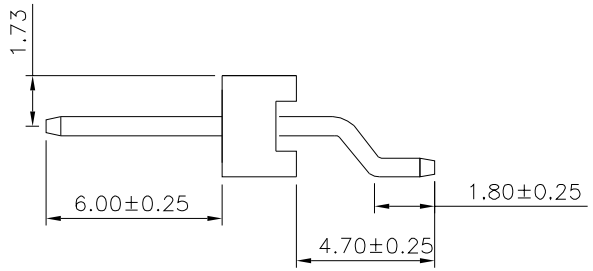

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
11195	MEI	.X ±0.38
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY CYP	.XXX ±0.05
SCALE NONE	REV. B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	B1	Modify Data	HZF	03/20/2025
⚠0	B0	NEW RELEASE	HZF	10/16/2019