


File No. 182PC20237 SHEET 1/1

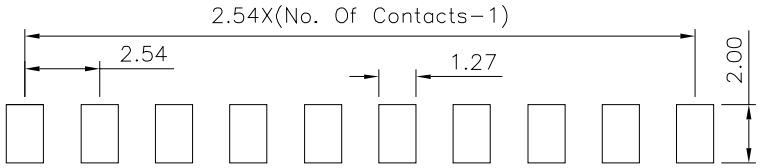


Recommended P.C.B. Layout



1X2P~1X36P




1X37P,1X38P,1X39P





1X40P

SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
⚠1 Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

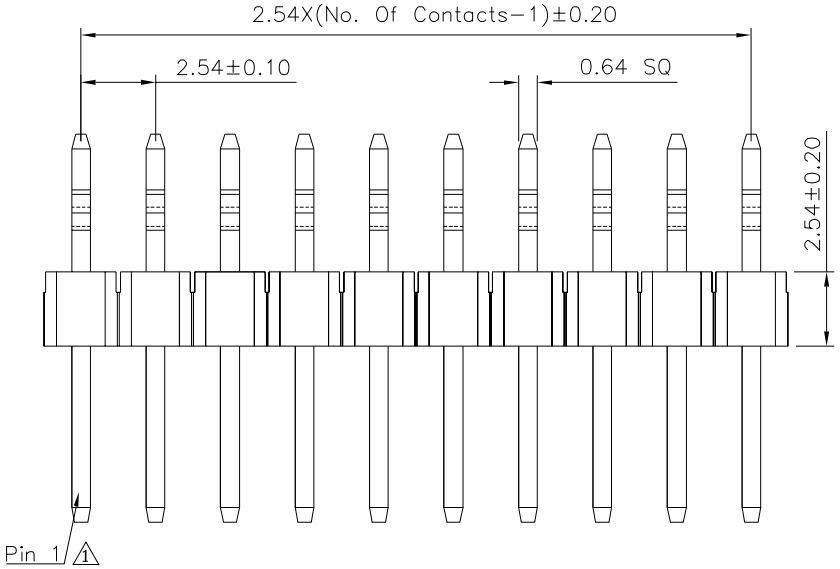

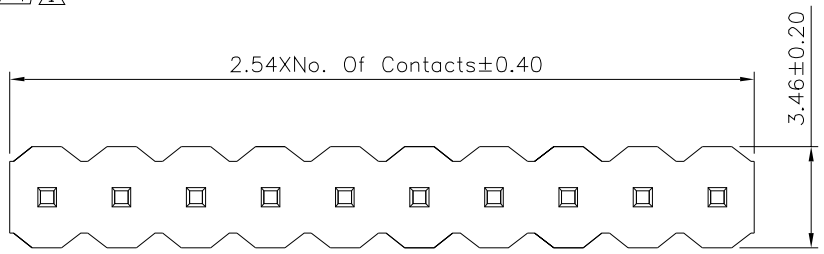

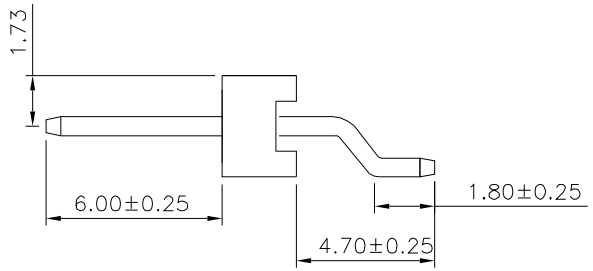

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. 11199	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
	CHECKED BY HZF	.X ±0.38			
	DRAWING BY CYP	.XX ±0.25			
		.XXX ±0.05			
SCALE NONE	REV. B1	UNIT mm	⚠1	B1 Modify Data	HZF 03/20/2025
			⚠0	B0 NEW RELEASE	HZF 10/16/2019
			NO.	REV. REVISIONS	CHK DATE