

Recommended P.C.B. Layout



1X2P~1X36P





1X37P, 1X38P, 1X39P



1X40P

SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

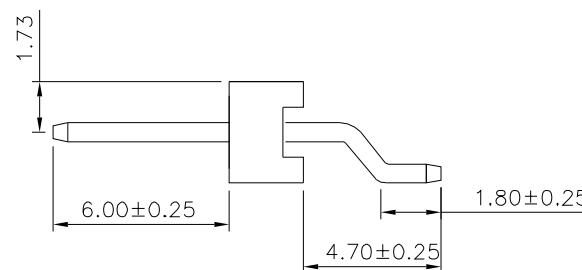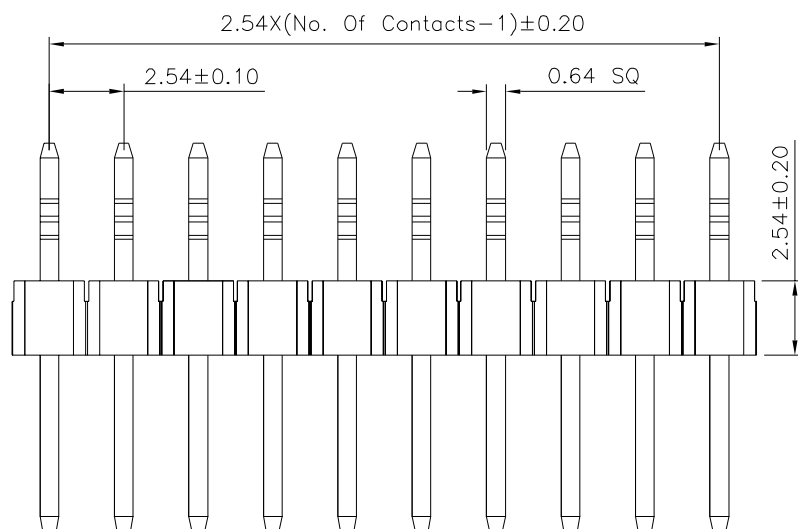

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11201

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX ±0.05

UNIT mm



NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

HZF

10/16/2019