
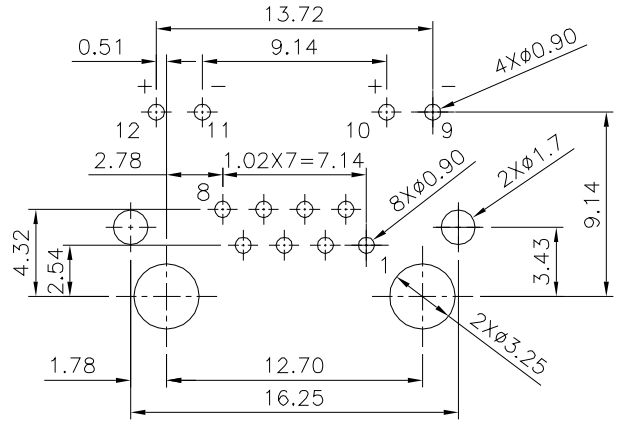
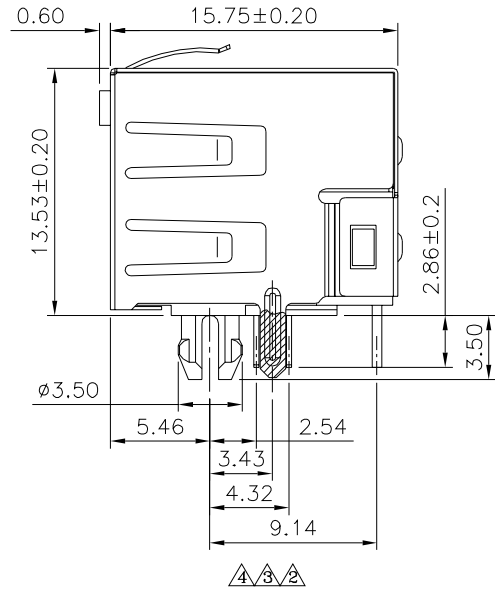



△△△ SPECIFICATION

Current Rating:1.5 Amp
 Voltage Rating:125V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. @500V DC
 Dielectric Strength:500V AC Or 750 DC RMS
 At 0.5mA 50Hz/60Hz For 1 Minute
 LED Operation Voltage:1.8~2.6V
 LED Operation Current:20mA Max.
 Operation Temperature:-40°C~+85°C
 Storage Temperature:-40°C~+85°C Relative Humidity<80%
 Mating/Unmating Force:30N Max.
 Durability:750 Cycles Min.
 Retention Strength:50N Min. For 60s±5s
 Contact:Phosphor Bronze
 Shield:Brass,Nickel Plated
 Gold Plated 6u" On Contact Area,
 Tin Plated On Solder Tails,Over Nickel

△ Housing & Insert:PBT(UL94V-0),Black
 Mates With Modular Plug Conforming To
 FCC Part 68,Subpart F.
 RoHS Compliant

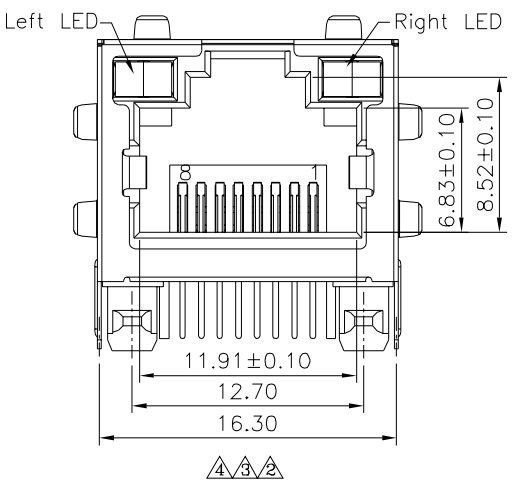

△△△ Recommended P.C.B. Layout(Component Side)
 PCB Board Tolerance±0.05(Thickness=1.60mm) △

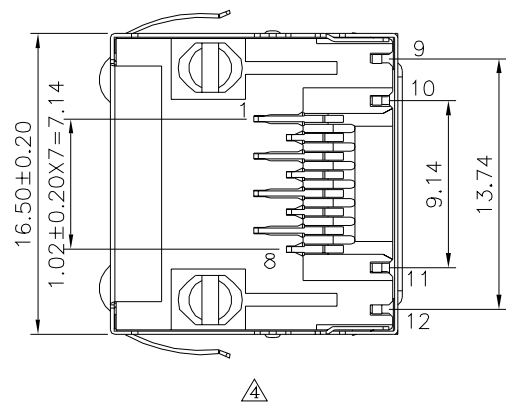

LED Color					
Code	Forward	Reverse	Code	Forward	Reverse
A	Green	Red	J	Green	Orange
C	Green	Yellow(Amber)	K	Black	---
D	Yellow	Red	L	Lime	---
E	Yellow	Green	M	Orange	Green
F	Red	Green	N	Amber	---
G	Green	---	O	Orange	---
H	Red	Yellow	R	Red	---
I	Beige	---	Y	Yellow	---

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY	
11257		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		CYP	
SCALE	NONE	REV.	B4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ 0~15 ±0.15
 △ 15~30 ±0.20
 △ 30~ ±0.25
 ANG. ±1°

UNIT mm

△ B4	Modify Data	HZF	08/02/2018
△ B3	Modify Data	HZF	04/14/2016
△ B2	Modify Data	HZF	08/13/2014
△ B1	Modify Data	HZF	09/21/2012
△ B0	NEW RELEASE	HZF	09/07/2010
NO.REV.	REVISIONS	CHK	DATE