
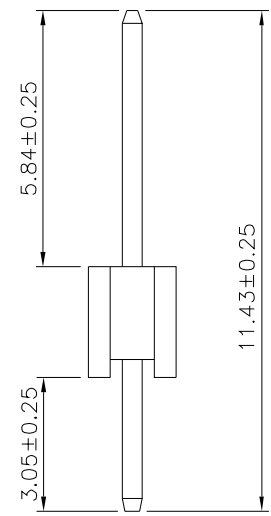
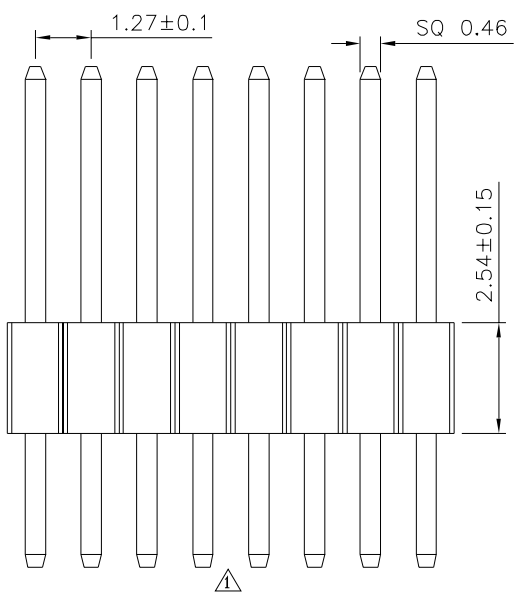


△ Recommended P.C.B. Layout (Top View)
 (PCB Board Tolerance ± 0.05)

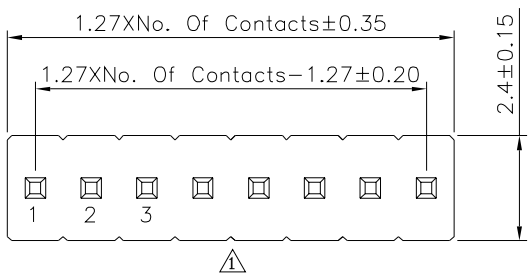

△ SPECIFICATION

Current Rating: 1A
 Withstand Voltage: 500V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Insulator: PA9T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
11276		EMILY		
		CHECKED BY		
		HZF		
DRAWING BY		HAO		X: ± 0.25 X.: $\pm 2^{\circ}$.X ± 0.20 .X: $\pm 1.5^{\circ}$.XX ± 0.15 .XX: $\pm 1^{\circ}$.XXX ± 0.10 .XXX: $\pm 0.5^{\circ}$
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	09/06/2023
△ A0		NEW RELEASE	HZF	01/01/2015