



△△ SPECIFICATION


Current Rating:3A(22 AWG)
Voltage Rating:250V AC(RMS)/DC
Withstand Voltage:1000V AC For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Ambient Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-0),White
Contact:Brass,Tin Plated
RoHS Compliant

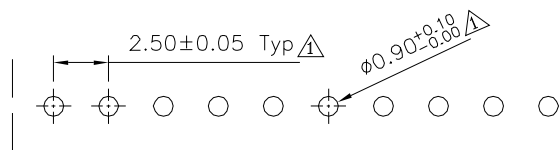


Recommended P.C.B. Layout

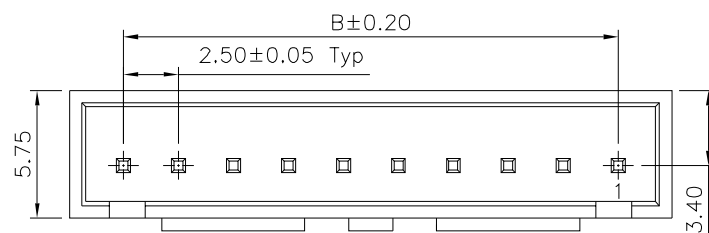


△




△ 04~05 Pin

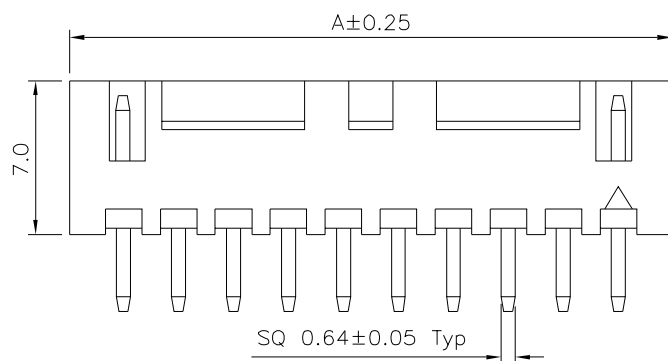


△△ 06~16 Pin



△



△ 02 Pin



△ 03 Pin

△ Pin	A	B
02	7.48	—
03	9.98	5.00
04	12.48	7.50
05	14.98	10.00
06	17.48	12.50
07	19.98	15.00
08	22.48	17.50
09	24.98	20.00
10	27.48	22.50
11	29.98	25.00
12	32.48	27.50
13	34.98	30.00
14	37.48	32.50
15	39.98	35.00
△ 16	42.48	37.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

11301

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

SCALE

NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.25
.XX ±0.15
.XXX ±0.08

UNIT
mm



△ A3

Modify Data

HZF 03/08/2019

△ A2

Modify Data

HZF 07/18/2013

△ A1

Modify Data

HZF 08/18/2009

△ A0

NEW RELEASE

HZF

NO. REV.

REVISIONS

CHK

DATE