


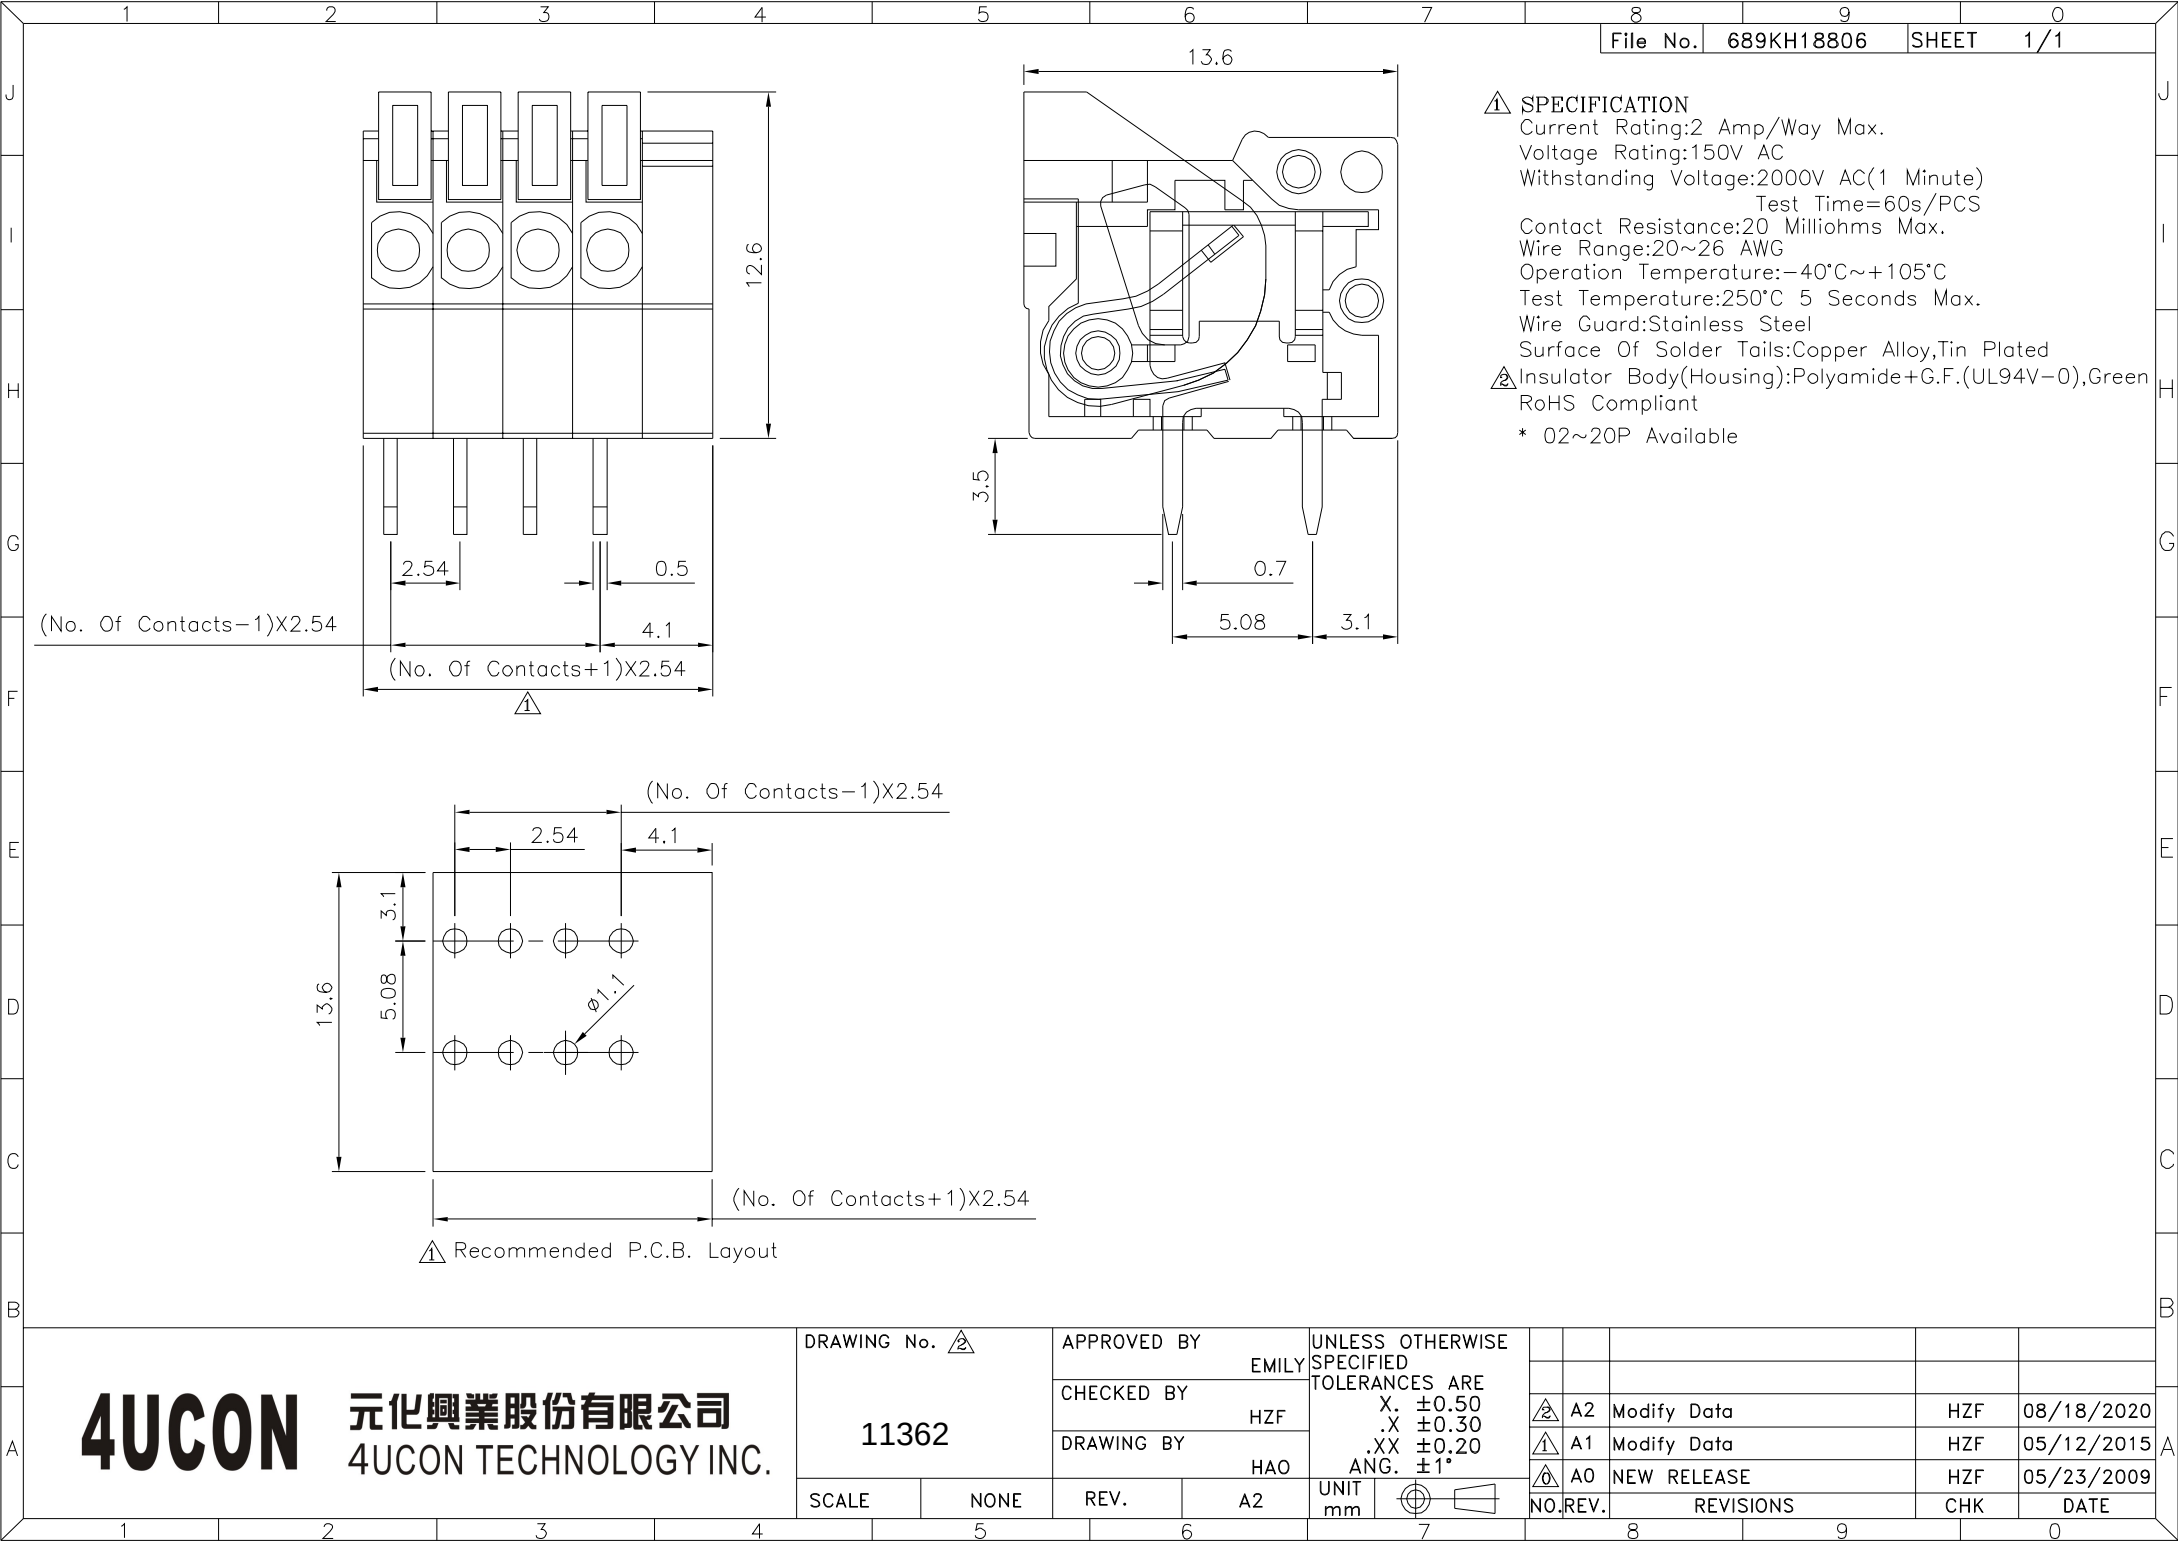

△ SPECIFICATION
Current Rating:2 Amp/Way Max.
Voltage Rating:150V AC
Withstanding Voltage:2000V AC(1 Minute)
Test Time=60s/PCS
Contact Resistance:20 Milliohms Max.
Wire Range:20~26 AWG
Operation Temperature:-40°C~+105°C
Test Temperature:250°C 5 Seconds Max.
Wire Guard:Stainless Steel
Surface Of Solder Tails:Copper Alloy,Tin Plated
△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant
* 02~20P Available

4Ucon 元化興業股份有限公司 4Ucon TECHNOLOGY INC.				DRAWING No. 		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°						
						EMILY								
						CHECKED BY								
						DRAWING BY								
		11362		HAO						 A2	Modify Data		HZF	08/18/2020
										 A1	Modify Data		HZF	05/12/2015
										 A0	NEW RELEASE		HZF	05/23/2009
SCALE		NONE		REV.		A2		UNIT		NO. REV.	REVISIONS		CHK	DATE
mm														
7														
8		9		0										