

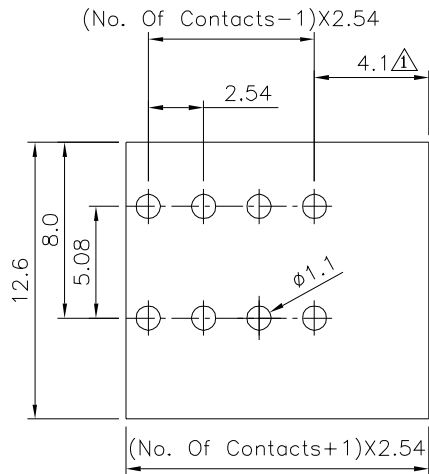



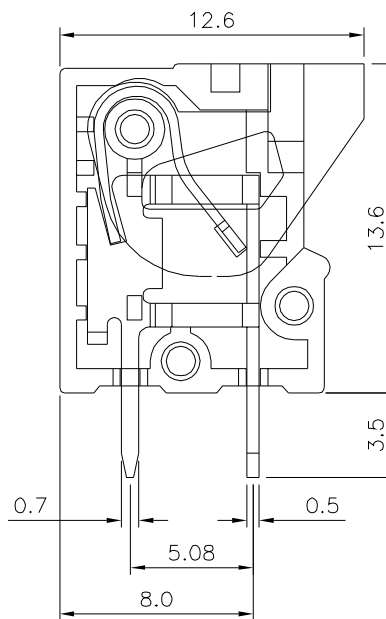

Recommended P.C.B. Layout

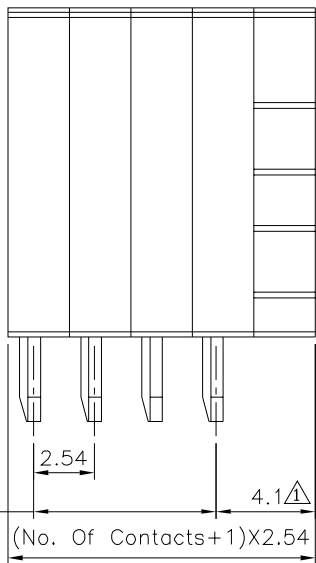

SPECIFICATION

Current Rating:2 Amp/Way Max.

Voltage Rating:150V AC

Withstanding Voltage:2000V AC(1 Minute)

Test Time=60s/PCS

Contact Resistance:20 Milliohms Max.

Wire Range:20~26 AWG

Operation Temperature:-40°C~+105°C

Test Temperature:250°C 5 Seconds Max.

Wire Guard:Stainless Steel

Surface Of Solder Tails:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

* 02~20P Available

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 431

11396

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A4

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ± 0.50


.X ± 0.30

.XX ± 0.20

ANG. $\pm 1^\circ$

UNIT

mm



4 A4

Modify Data

HZF

06/18/2020

3 A3

Modify Data

HZF

05/12/2015

2 A2

Modify Data

HZF

09/10/2013

1 A1

Modify Data

HZF

01/06/2012

0 A0

NEW RELEASE

HZF

05/23/2009

NO. REV.

REVISIONS

CHK

DATE