

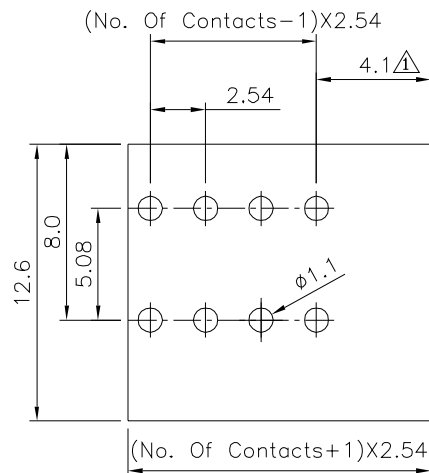



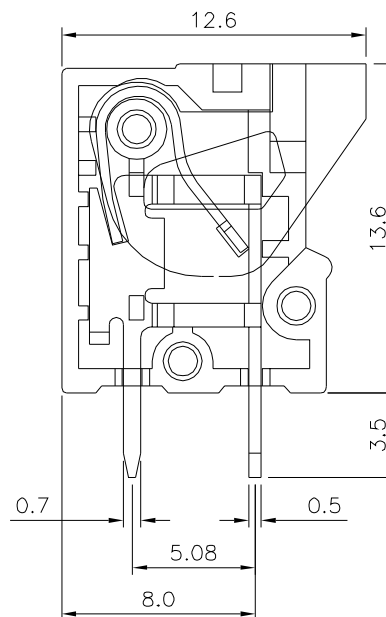

Recommended P.C.B. Layout

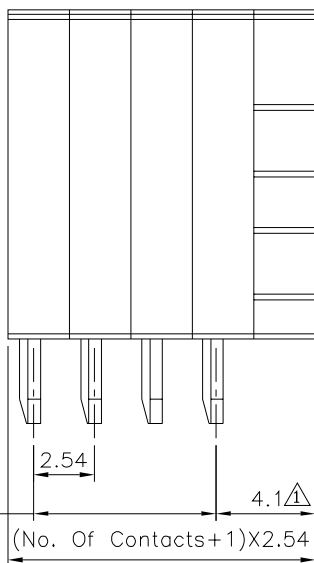

- △△ SPECIFICATION**
 Current Rating:2 Amp/Way Max.
 Voltage Rating:150V AC
 Withstanding Voltage:2000V AC(1 Minute)
 Test Time=60s/PCS
 Contact Resistance:20 Milliohms Max.
 Wire Range:20~26 AWG
 Operation Temperature:-40°C~+105°C
 Test Temperature:250°C 5 Seconds Max.
 Wire Guard:Stainless Steel
 Surface Of Solder Tails:Copper Alloy,Tin Plated
 △ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant
 * 02~20P Available

4UCON

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△△

11398

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	06/18/2020
△	A3	Modify Data	HZF	05/12/2015
△	A2	Modify Data	HZF	09/10/2013
△	A1	Modify Data	HZF	01/06/2012
△	A0	NEW RELEASE	HZF	05/23/2009