

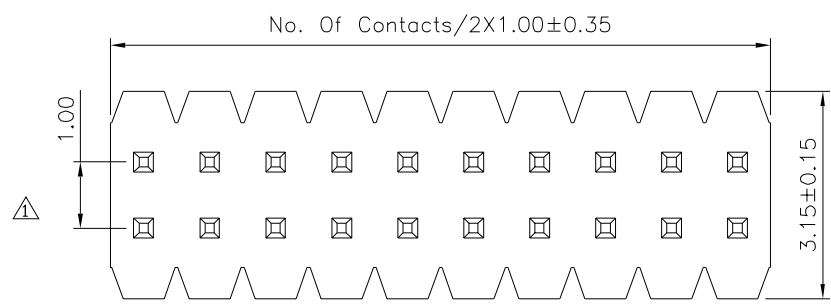


⚠ Recommended P.C.B. Layout

**⚠ SPECIFICATION**  
 Current:1A  
 Withstanding Voltage:500V AC/Minute  
 Insulation Resistance:5000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 ⚠ Contact:Brass,Gold Flash Over Nickel  
 ⚠ No. Of Contacts:04~100 Contacts  
 RoHS Compliant

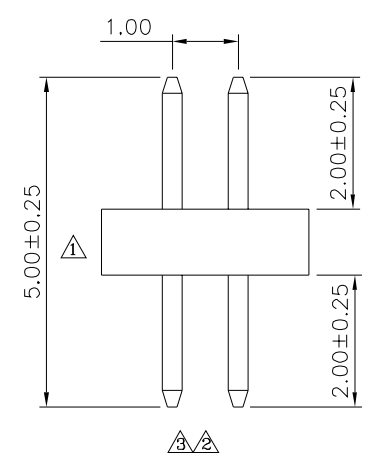

⚠

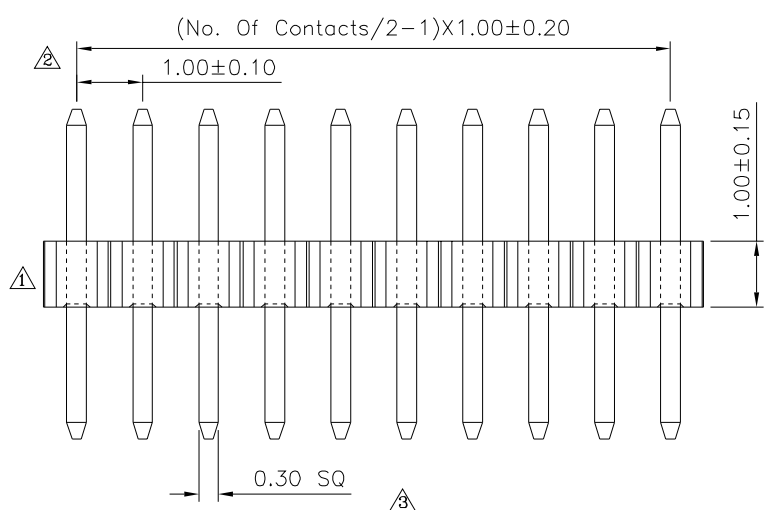

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. **11516**

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG ±5°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A3	Modify Data	HZF	08/02/2019
⚠	A2	Modify Data	HZF	05/21/2011
⚠	A1	Modify Data	HZF	10/15/2009
⚠	A0	NEW RELEASE	HZF	