
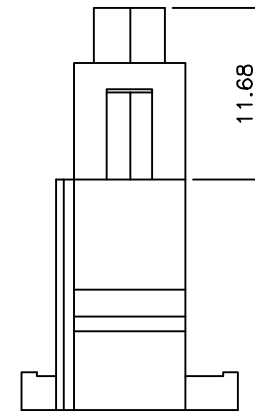
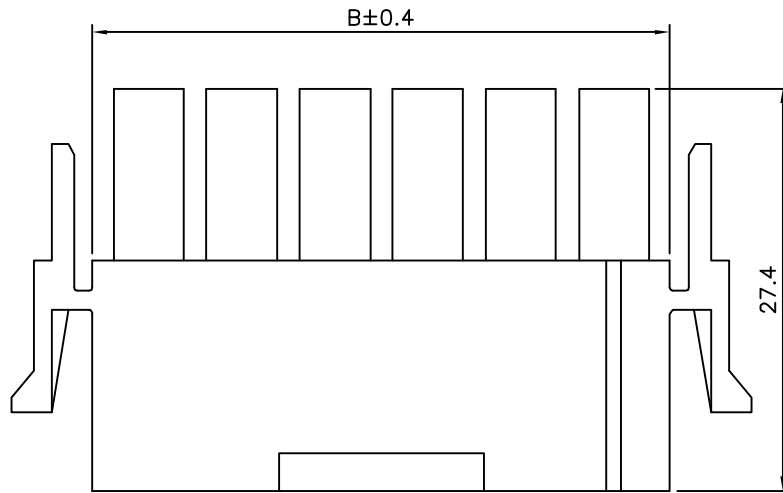


**△ SPECIFICATION**

Current Rating:11A  
 Voltage Rating:600V  
 Withstanding Voltage:5000V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA66(UL94V-2),Nature  
 RoHS Compliant

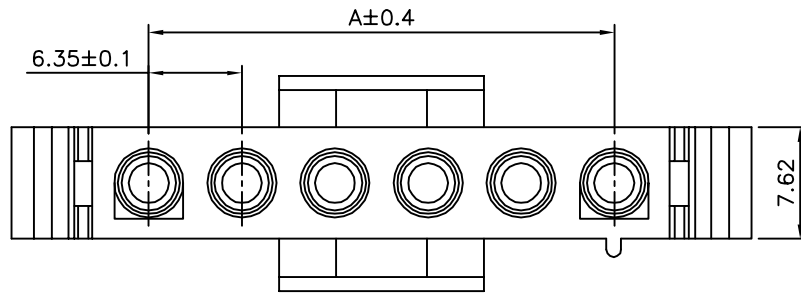

△ Pin	A	B
6	31.75	39.37
7	38.10	45.72
8	44.45	52.07
9	50.80	58.42
10	57.15	64.77

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 12310

APPROVED BY  
 EMILY  
 CHECKED BY  
 HZF  
 DRAWING BY  
 SAN

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.40  
 .XX ±0.25  
 .XXX ±0.08

SCALE NONE

REV. A2

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	07/01/2014
△ A1		Modify Data	HZF	11/07/2011
△ A0		NEW RELEASE	HZF	01/23/2007