File No.	424	SHEET	1 /1

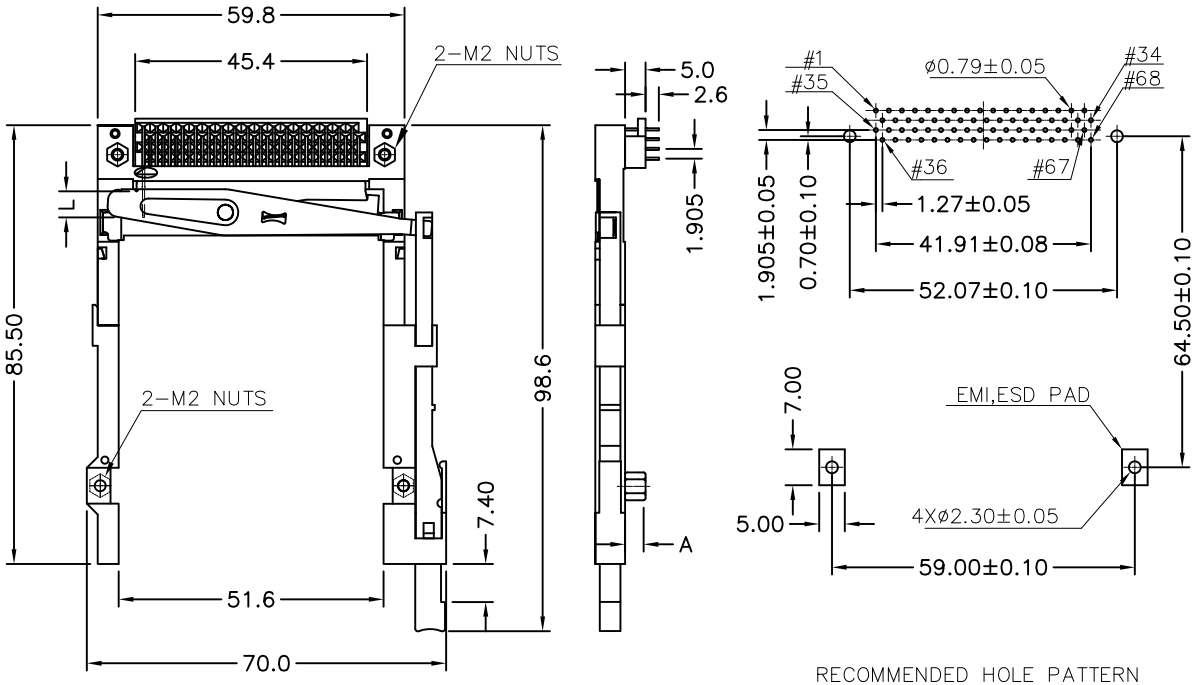

RECOMMENDED HOLE PATTERN

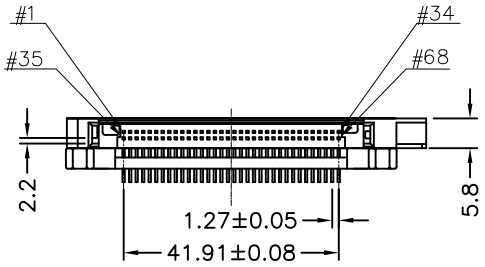



SPECIFICATIONS
Insulator: UL 94V-0 LCP,PBT
Contact: Copper Alloy
Color: Black
Contact Plating: Selective 15u" Gold over 50u" Nickel Overall
Voltage Rating: 3.3V
With 4Pcs M2 Screws
Accept PCMCIA Type I, Type II or Type III Card

Pin Type	Dim. L ±0.10	Pin Number
Detect	3.50	36, 67
General	4.25	All Other Pins
Power	5.00	1,17,34,35,51,68

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
12503	MEI	.X ±0.30
	CHECKED BY BECKY	.XX ±0.20
	DRAWING BY TCF	.XXX ±0.10
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE		