

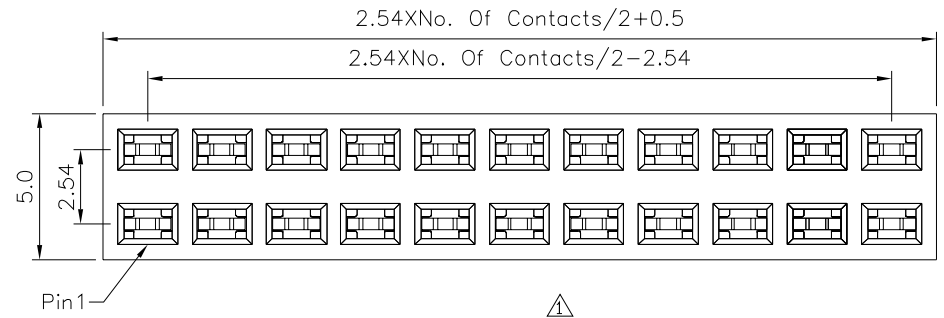


Recommended P.C.B. Layout

△ SPECIFICATION
 Current Rating: 1 Amp
 Insulation Resistance: 3000 Megaohms Min.
 Contact Resistance: 30 Milliohms Max.
 Dielectric Withstanding Voltage: 500V AC For 1 Minute
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT+G.F. (UL94V-0), Black
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 RoHS Compliant



Pin 1

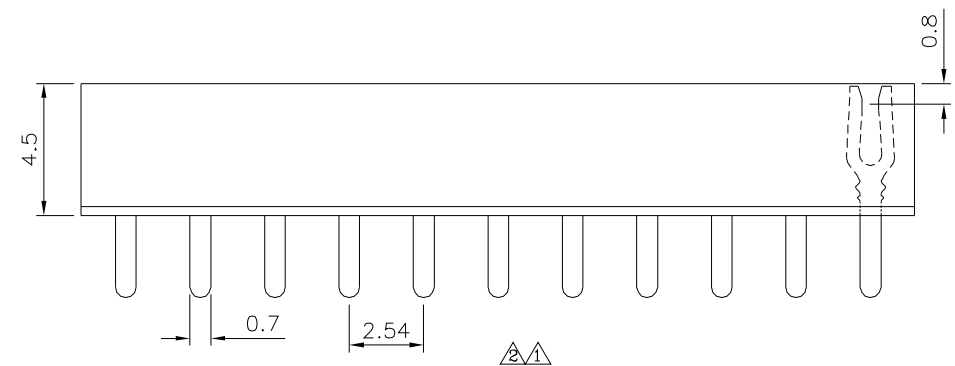

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 12524		APPROVED BY MEI	
		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
△	.X	±0.38	
△	.XX	±0.25	
ANG.			
UNIT	mm		
NO.	REV.	REVISIONS	DATE
△	A2	Modify Data	HZF 08/09/2017
△	A1	Modify Data	HZF 04/21/2012
△	A0	NEW RELEASE	
CHK	DATE		