



△△




Detail X

△ SPECIFICATION


Insulator:PBT+G.F.(UL94V-0),Black  
 Contact:Phosphor Bronze  
 Gold Plated 06u" On Contact Area,Gold  
 Flash On Other Area,Over Nickel  
 Shield:Copper Alloy,Nickel Plated  
 Cavity Confirms To FCC Rules And Regulations Part  
 68,Subpart F  
 RoHS Compliant

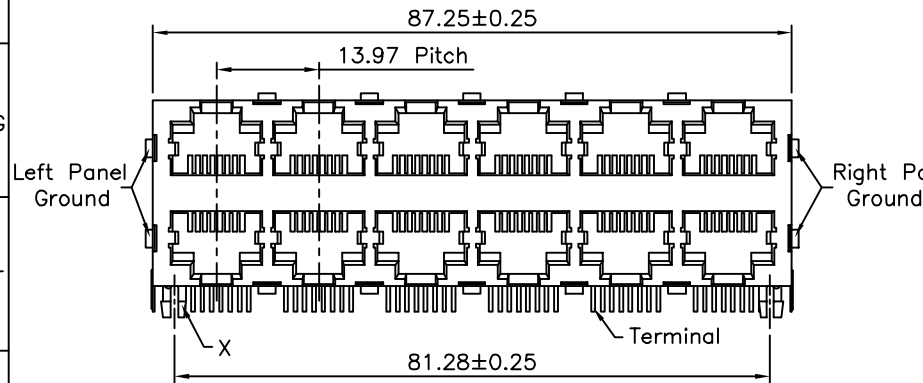


△△

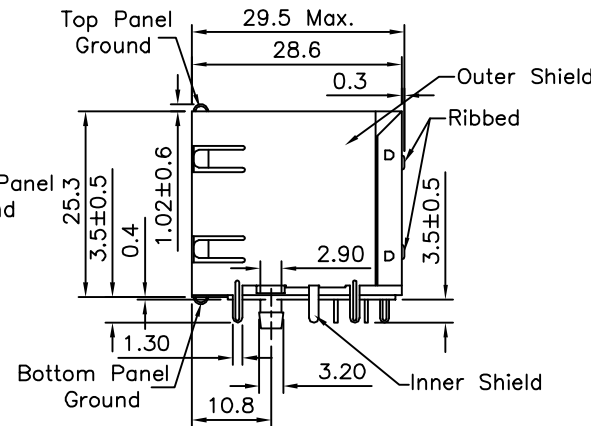

△△

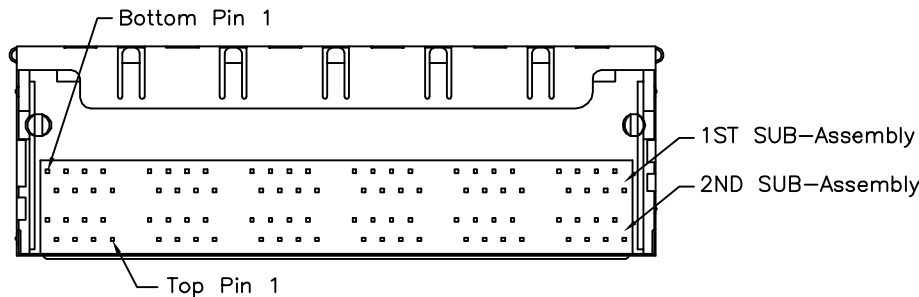

△△

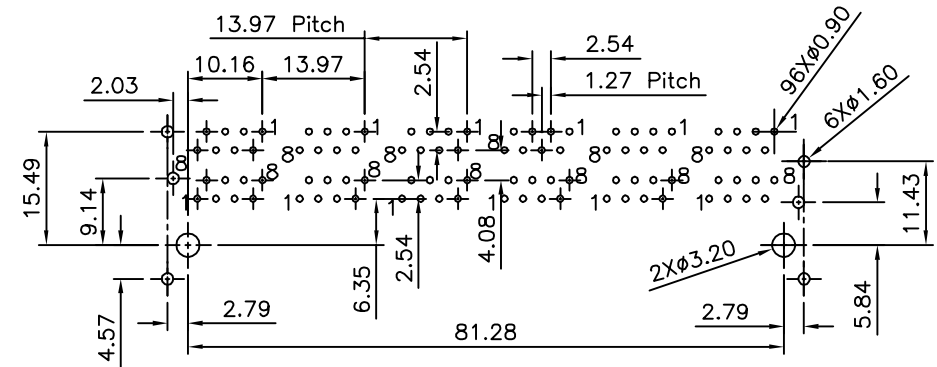

△ Recommended P.C.B. Layout

**4UCON**

元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

12932

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG


REV.

B2

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.13  
 .XXX ±0.05  
 ANG. ±0.5°

UNIT

mm



| NO.  | REV. | REVISIONS   | CHK  | DATE       |
|------|------|-------------|------|------------|
| △ B2 |      | Modify Data | HZF  | 08/13/2014 |
| △ B1 |      | Modify Data | HZF  | 07/01/2010 |
| △ B0 |      | NEW RELEASE | SHIN | 04/23/2007 |