
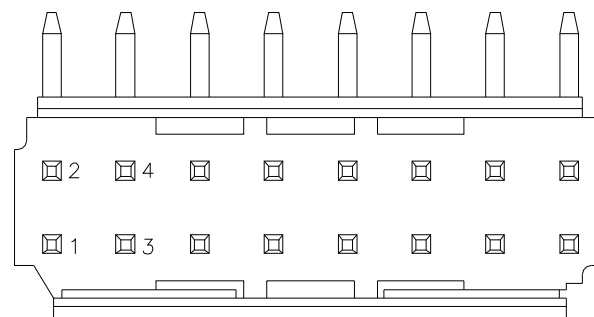



SPECIFICATION

Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-25°C~+85°C
Insulator:PA66+15%G.F.(UL94V-0),Black
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

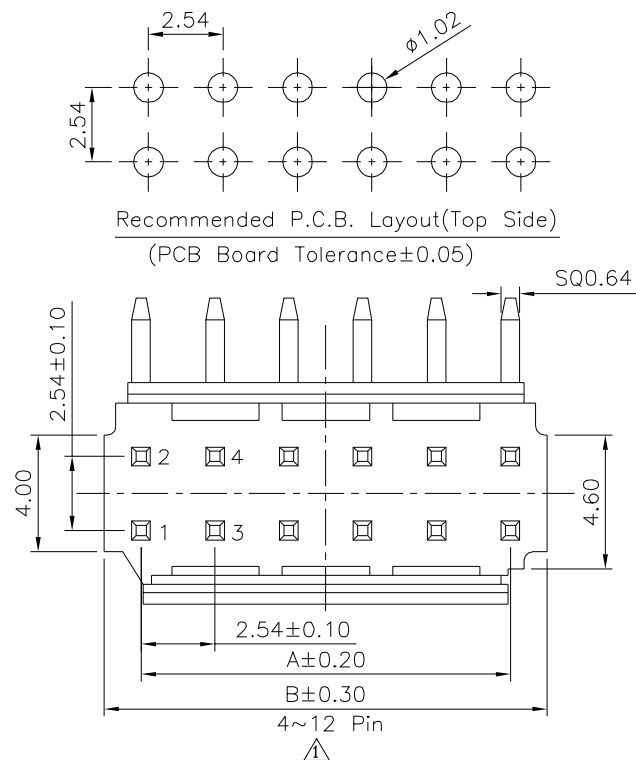

△16~40 Pin

13192

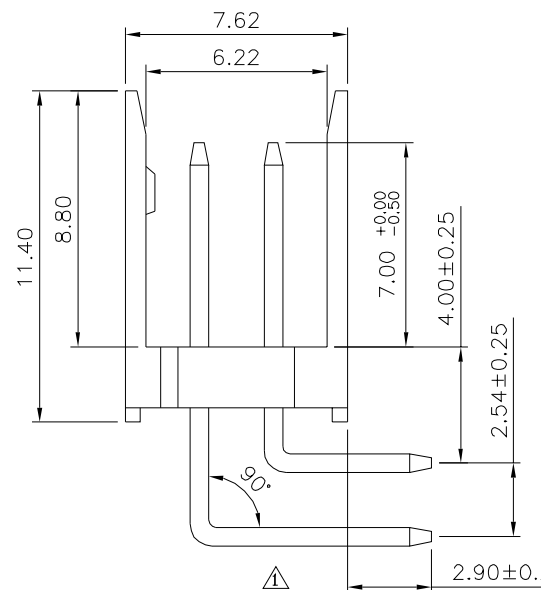

元化興業股份有限公司
4UCON TECHNOLOGY INC.

4UCON

Pin	A	B
04	2.54	5.08
06	5.08	7.62
08	7.62	10.16
10	10.16	12.70
12	12.70	15.24
16	17.78	20.32
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
30	35.56	38.10
34	40.64	43.18
36	43.18	45.72
40	48.26	50.80

DRAWING No.		APPROVED BY		UN SP TO
		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UN
		CYP		
SCALE	NONE	REV.	A2	UN m

NO. REV.		REVISIONS		CHK	DATE
A2		Modify Data		HZF	12/03/2014
A1		Modify Data		HZF	09/02/2014
A0		NEW RELEASE		HZF	07/10/2011