
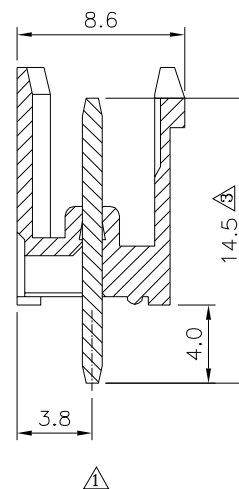
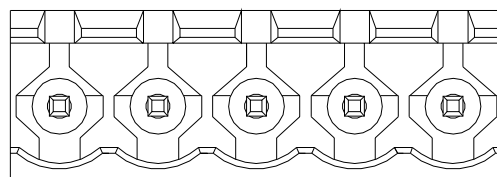


Recommended P.C.B. Layout

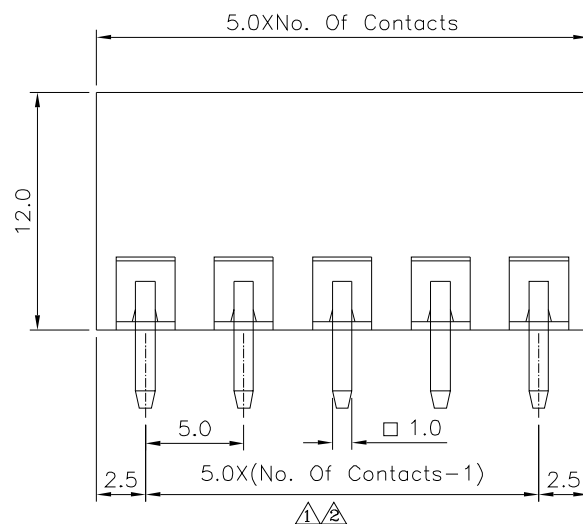

$\triangle_3 \triangle_1$ SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Using Temperature Range:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 13

13283

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.	
------	--


A3

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

TOLERANCES ARE

$\triangle 2$	X.	± 0.50
	.X	± 0.30
	.XX	± 0.20
	ANG.	$\pm 1^\circ$

UNIT	mm
------	----



3	A3

Modify Data

HZF

10/30/2023

A2	A2

Modify Data

HZF

10/24/2015	
------------	--

	
	A1

Modify Data	
-------------	--

HZF

08/08/2012

		
		A0

RELEASE

H7F

08/12/2009
