



File No.	6890J29801	SHEET	1/1

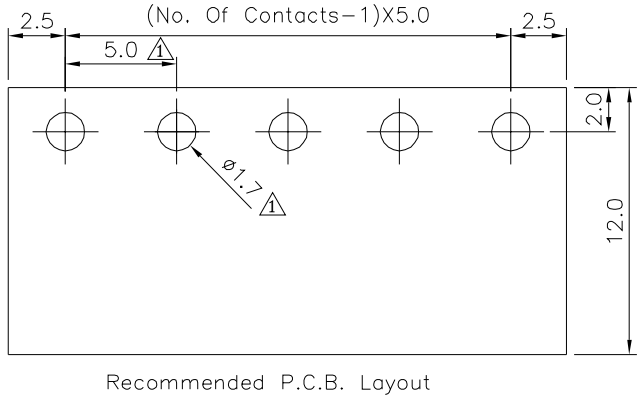

Recommended P.C.B. Layout

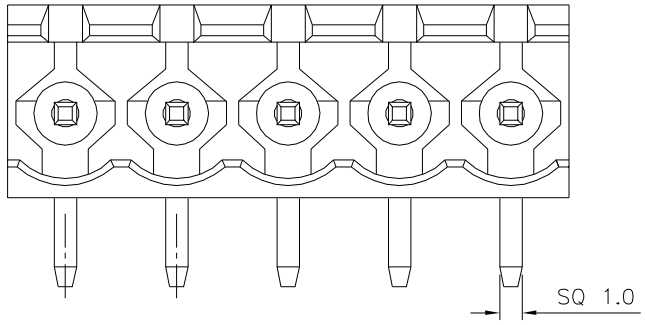

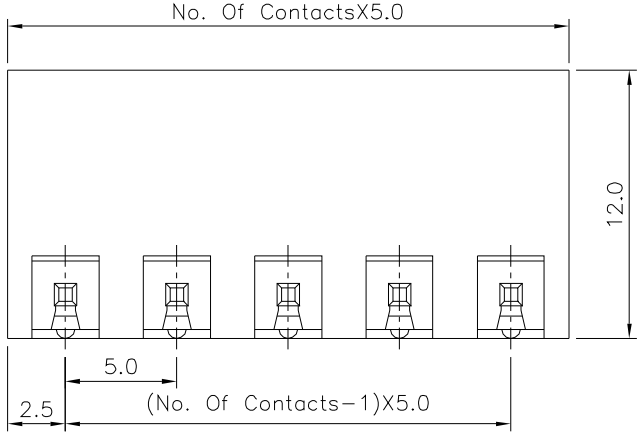

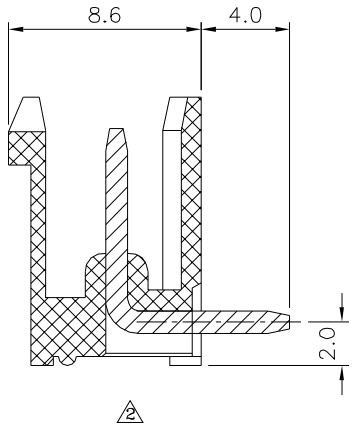

3 2 1 SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC/Minute
Using Temperature Range:−40°C~+105°C
Insulator:Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. 1 3	APPROVED BY EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X°. ±1°
13288	CHECKED BY HZF	
	DRAWING BY HAO	
SCALE NONE	REV. A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	10/29/2024
2	A2	Modify Data	HZF	03/07/2015
1	A1	Modify Data	HZF	04/20/2011
0	A0	NEW RELEASE	HZF	05/13/2009