

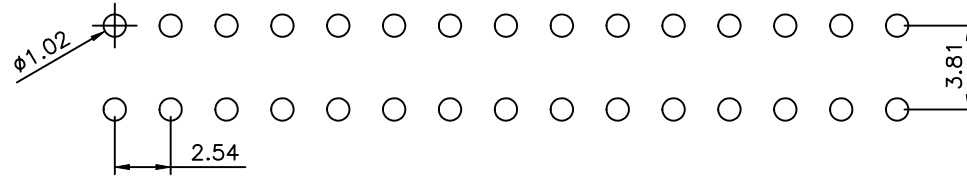



SPECIFICATION

Current Rating:3.0Amp
 Voltage Rating:500V AC/DC
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze
 Gold Plated Over Nickel
 Insulator:PA6T+30%GF UL94V-0
 RoHS Compliant

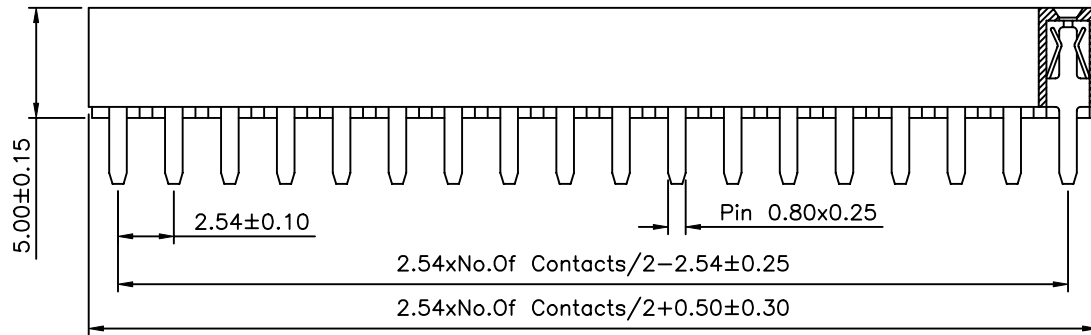

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance ± 0.05)

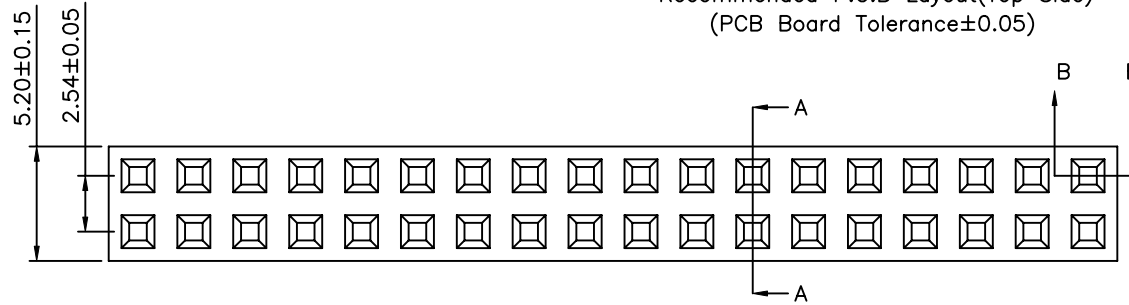

Section: A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13321

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LXX

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 .X ± 0.40
 .XX ± 0.25
 .XXX ± 0.15
 ANG: $\pm 3^\circ$

SCALE

NONE

REV.

A1

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify P/N	HZF	05/19/2008
△A0		NEW RELEASE	HZF	04/25/2007

NO. REV. REVISIONS CHK DATE