

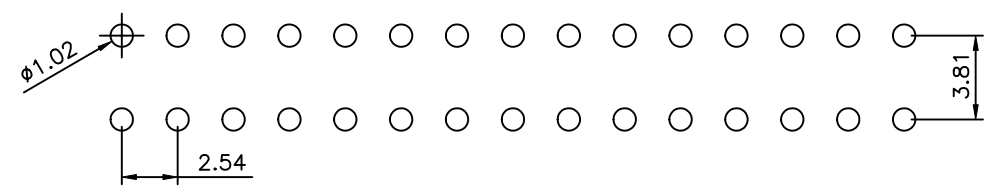



SPECIFICATION
 Current Rating:3.0Amp
 Voltage Rating:500V AC/DC
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze
 Gold Plated Over Nickel
 Insulator:PA6T+30%GF UL94V-0
 RoHS Compliant

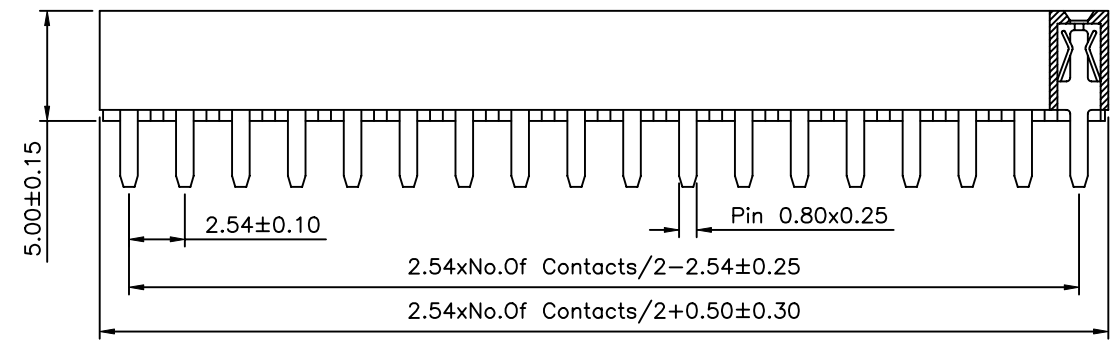

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance±0.05)

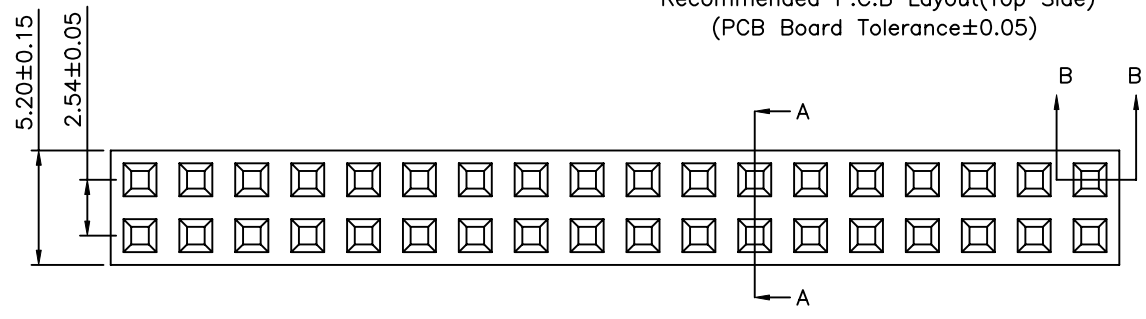

Section: A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG: ±3°
13326		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		LXX		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify P/N	HZF	05/19/2008
△	A0	NEW RELEASE	HZF	04/25/2007