


Recommended P.C.B. Layout

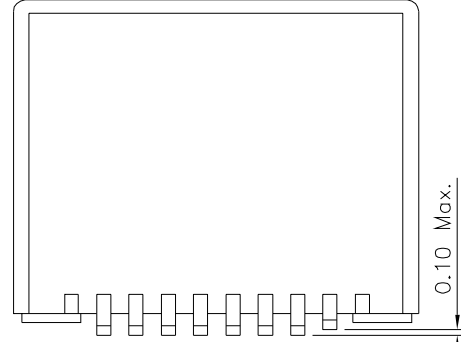

Coplanarity:
The Maximum Distance Between Lowest And Highest Pin When Housing Rests On A Flat Surface

△△△ SPECIFICATION
 Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature: -40°C~+85°C
 Insulation Resistance:500 Megaohms Min. (Initial)
 At 500V DC For 1 Minute
 Contact Resistance:20 Milliohms Max.(Initial)
 Dielectric Withstanding Voltage:
 1000V RMS. At 60Hz,1 Minute Between
 Adjacent Contacts
 1500V RMS. At 60Hz,1 Minute Between
 Shield And Contacts
 Housing:PA9T(UL94V-0),Black
 Contact:Phosphor Bronze,
 Gold Plated 06u" On Contact Area,
 Gold Flash On Other Area,Over Nickel
 Hold Down:Brass,Tin Plated
 Cavity Conforms To FCC Rules And
 Regulations Part 68,Subpart F.
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
13394

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05
 ANG. ±0.5°

SCALE NONE REV. A3 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	06/18/2024
△2	A2	Modify Data	HZF	01/30/2024
△1	A1	Modify Data	HZF	03/02/2016
△0	A0	NEW RELEASE	HZF	02/10/2013